

# Prospect towards steady-state helical fusion reactor based on progress of LHD project entering the deuterium experiment phase

Y. Takeiri

*National Institute for Fusion Science, National Institutes of Natural Sciences, and SOKENDAI (the Graduate University for Advanced Studies), 322-6 Oroshi, Toki 509-5292, JAPAN*

**Abstract**— Large Helical Device (LHD) is one of the world largest superconducting fusion experiment devices, having demonstrated its inherent advantage for steady-state operation since the start of experiments in 1998. LHD has also demonstrated reliable operation of the large-scale superconducting magnet system for almost two decades. Development of the challenging heating systems, such as negative-ion-based NBI, high-power and high-frequency ECH and steady-state ICH, have led to wide-ranging physics and engineering achievements.

LHD has progressed to the next stage, that is, the deuterium experiment starting in March 2017, which should further extend plasma parameters towards reactor-relevant regime. For establishing firm basis for designing steady-state helical fusion reactor, advanced physics research, such as on isotope effect, energetic particle confinement, and plasma-wall interaction, will be intensively performed in the deuterium experiments. In an engineering aspect, the upgrade of NBI system has been carried out in preparation to the deuterium experiment, and it should contribute to future NBI development for fusion reactors including ITER. For enhancement of the particle control, the closed divertor system has been installed with pumping capability. Diagnostics for neutron measurements are newly developed and installed for the deuterium experiment.

Aligned with all the progress of LHD project in terms of engineering and physics aspects, the conceptual design activity of the LHD-type helical fusion reactor, FFHR-d1, has been programmatically conducted. In parallel to the design study, engineering R&Ds for the component development have been performed, including those based on employing challenging ideas such as high-temperature superconductor, liquid metal ergodic divertor, and molten salt breeder blanket.

The present status of LHD project entering the deuterium experiment phase is overviewed with putting emphasis on the engineering aspects, and then the engineering R&D activities towards steady-state helical fusion reactor are described.

**Index Terms**—LHD, superconducting magnets, high-performance plasmas, steady-state operation, plasma heating devices, deuterium experiment, FFHR-d1, challenging engineering ideas.

This paper was submitted on June 30, 2017. The LHD experiment and all of NIFS activities has been continuously and strongly supported by The Ministry of Education, Culture, Sports, Science and Technology (MEXT), Japan, and domestic and international collaborators.

## I. INTRODUCTION

The Large Helical Device (LHD) is one of the world largest superconducting helical devices. The LHD is an optimized heliotron with simply and continuously wound helical coils, characterized by currentless, i.e., disruption-free plasmas with inherent capability of steady-state operation [1].

The LHD has been operated since 1998, without any severe cryogenic troubles. LHD is equipped with three kinds of heating systems, NBI (neutral beam injection) system [2] currently with 3 negative-ion-based injectors and 2 positive-ion-based injectors, ECH (electron cyclotron heating) system [3] with powerful gyrotrons, and ICH (ion cyclotron heating) system [4] mainly utilized for long-pulse discharge. ICH is currently removed for smooth initiation of the deuterium experiment. These heating systems have much contributed to wide-ranging parameter extension and physics experiments.

The LHD, as the one of helical experiment devices, has played complementary and alternative roles to tokamak approach, and made progress on comprehend physics understandings of toroidal plasmas and on establishing scientific basis for a helical fusion reactor.

## II. BRIEF OVERVIEW OF ACHIEVEMENTS IN LHD (HYDROGEN PLASMA EXPERIMENT PHASE)

Here, in this section, achievements in LHD during the previous hydrogen plasma experiment phase is briefly overviewed. High-performance and steady-state plasmas are required to realize fusion reactor. LHD has pursued this based on Japan-originated heliotron concept, with inherent advantage for steady-state operation.

LHD has demonstrated almost 48 min-long discharge with a few keV range with a MW-class heating, achieving the world record of total injected energy, 3.36 GJ [5]. LHD has explored a long-pulse operation regime towards a reactor-relevant regime while the improvement of the plasma performance (such

Y. Takeiri: National Institute for Fusion Science, National Institutes of Natural Sciences, and SOKENDAI, 322-6 Oroshi, Toki 509-5292, JAPAN (e-mail: takeiri@nifs.ac.jp).

as measured by the fusion triple product) is required. On the other hand, tokamaks should achieve steady-state operation keeping its high plasma performance. In such a way, synergetic progress on high-performance and steady-state operation beyond the confinement concept is quite important.

Progress towards high-performance plasmas has also been made in recent years in LHD. The Table I is the summary for key plasma parameters achieved in hydrogen plasma experiment phase. Plasma temperature, density and beta values, have been progressing, accompanied with physics findings, highlighted by impurity hole formation [6], super dense core mode [7], and so on. Target values are also indicated in the Table, to be challenged in the on-going deuterium experiment. It should further extend these parameters towards reactor-relevant regime, in which advanced research can be performed for establishing firm basis for designing steady-state helical fusion reactor.

TABLE I  
PLASMA PARAMETERS ACHIEVED IN LHD  
(HYDROGEN PLASMA EXPERIMENT PHASE)

Parameters	Achieved (H phase)	Key physics	Target
$T_i$	8.1 keV ( $n_e = 1 \times 10^{19} \text{ m}^{-3}$ )	<b>Ion ITB</b> <b>Impurity hole</b>	10 keV ( $n_e = 2 \times 10^{19} \text{ m}^{-3}$ )
$T_e$	20 keV ( $2 \times 10^{18} \text{ m}^{-3}$ ) 10 keV ( $1.6 \times 10^{19} \text{ m}^{-3}$ )	<b>Electron ITB</b>	10 keV ( $2 \times 10^{19} \text{ m}^{-3}$ )
Density	$1.2 \times 10^{21} \text{ m}^{-3}$ ( $T_e = 0.25$ keV)	<b>Super dense core</b>	$4 \times 10^{20} \text{ m}^{-3}$ ( $T_e = 1.3$ keV)
$\beta$	5.1 % ( $B_T = 0.425$ T) 4.1 % (1 T)	<b>MHD in current-free plasmas</b>	5 % ( $B_T = 1 - 2$ T)
Steady-state operation	54min. 28sec (0.5MW, 1keV, $4 \times 10^{16} \text{ m}^{-3}$ ) 47min. 39sec. (1.2MW, 2keV, $1 \times 10^{19} \text{ m}^{-3}$ )	<b>Dynamic wall retention</b>	1 hour (3 MW)

Key plasma parameters ( $T_i$ : ion temperature,  $T_e$ : electron temperature, electron density, beta value, and steady-state operation) achieved in LHD (hydrogen plasma experiment phase) are summarized along with the relevant key physics and the target values of these parameters.

### III. CUTTING-EDGE ENGINEERING ASPECTS OF LHD

The above-mentioned achievements and expected further progress on research have been and will be firmly based on the cutting-edge engineering aspects of LHD in many regards. Below some highlighted features of those aspects are described.

#### A. Large-Scale Superconducting Magnets System

The superconducting system of LHD consists of a pair of helical coils, three pairs of poloidal coils, a cryostat, nine superconducting bus-lines, a helium liquefier/refrigerator, and

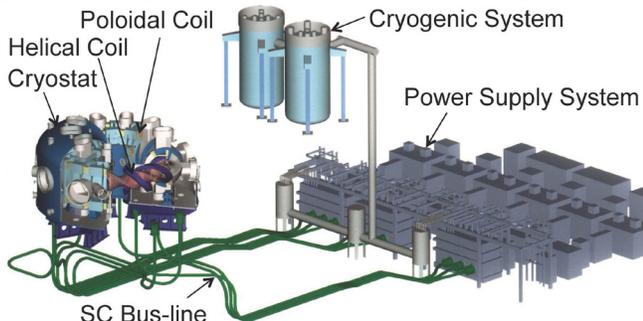


Figure 1 Superconducting system of LHD (cited, Fig. 1 in Ref. [8]).

six DC power supply systems, as shown in Fig. 1 [8]. The stored magnetic energy of 0.8 GJ is the largest among the superconducting experimental devices for nuclear fusion research. The total cold mass at 4 K is 822 tons (the helical coils of 240 tons, poloidal coils of 172 tons, and supporting structures of 410 tons). The helium refrigerator/liquefier has cooling capacities of 5.65 kW at 4.4 K, 650 liter/h liquefaction and 20.6 kW at 80 K [9]. Since the completion of eight-year construction (1990-1997), several types of remodeling and replacement have been carried out in the superconducting system to attain high availability, for example, a double-loop control system, additional helium tanks, enhancement of impurity reduction, and replacement to high speed CPU boards [8]. As the results of the efforts of maintenance, overall availability higher than 99% has been achieved, as shown in Fig. 2 and Table II. Recent major remodelings [10] are summarized here.

At the 14th campaign (fiscal year of 2010), despite of periodic regular inspections, thrust bearings of a screw compressor broke down after the start of the operation. The

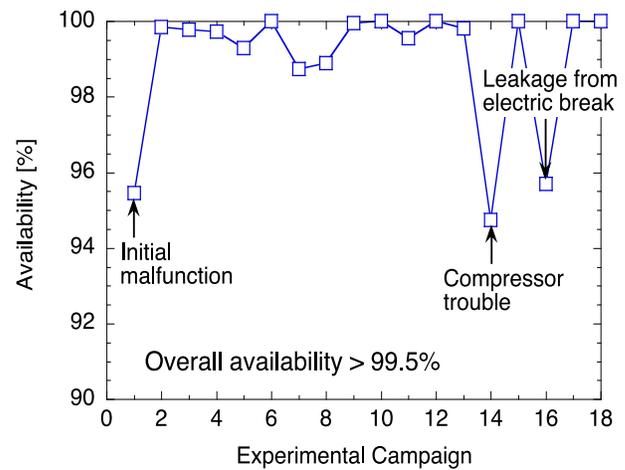


Figure 2 Availability of the LHD cryogenic system.

TABLE II  
AVAILABILITY OF THE LHD CRYOGENIC SYSTEM.

Campaign (FY)	Run time [hours]		Fault time [h]	Availability [%]
	Total	Steady state		
1 (1997-8)	2,895	1,350	138.0	95.2
2 (1998)	3,522	2,359	5.3	99.8
3 (1999)	5,361	3,965	12.4	99.7
4 (2000)	5,016	3,538	13.8	99.2
5 (2001)	5,294	3,791	38.2	99.9
6 (2002)	4,920	3,366	0.1	100.0
7 (2003)	5,001	3,446	64.5	98.7
8 (2004)	4,814	3,216	54.1	98.9
9 (2005)	5,035	3,470	2.3	100.0
10 (2006)	5,037	3,436	0	100.0
11 (2007)	5,184	3,607	23.4	99.5
12 (2008)	3,856	2,272	0.2	100.0
13 (2009)	3,688	2,152	7.0	99.8
14 (2010)	4,128	2,591	228.7	94.8
15 (2011)	3,527	2,112	0	100.0
16 (2012)	3,742	1,272	168.0	95.7
17 (2013)	3,581	2,088	0	100.0
18 (2014)	3,717	2,256	0	100.0
Total	78,318	50,287	756.0	99.5

thrust bearing failure was considered to be caused by accumulated metal powders in the compressor lubricant oil that had not been changed in order to prevent contamination of the cryogenic system with impurities such as water. The bearings and the lubricant oil of the compressors were exchanged for the repair. After the operation in the 14th campaign, the chemical composition of the lubricant oil and the amount of metal powders in the oil have been checked during the maintenance period. In addition, a set of redundant compressors in the 1st and 2nd stages have been added to back up the existing eight compressors.

During cool down in the 16th campaign, a cold leakage occurred in an electric break of one of the poloidal coils. The electric break is made of a glass fiber reinforced plastic tube that is bonded to metallic conduits with the adhesive. A cold leakage occurred from the bonded part of the tube due to the aging of the adhesive. The 16th campaign was carried out after repairing the electric break with epoxy resin and glass tapes. All electric breaks (120 places) in the poloidal coils were replaced after the completion of the campaign.

The control system of the helium liquefier/refrigerator was designed and developed as an open system utilizing VME (Versa Module Europa; the name of computer bus) controllers and UNIX workstations that was the newest system at the construction of LHD. However, the control equipment has been significantly advanced. Compact PCI (Peripheral Component Interconnect; the name of computer bus) controllers have been adopted in order to simplify the system configuration and to improve the system reliability. The new system consists of compact PCI controller and remote I/O connected with Ethernet/IP. Making the system redundant becomes possible by doubling CPU, LAN, and remote I/O respectively.

### B. Heating Systems

LHD has been equipped with NBI, ECH and ICH for heating plasmas up to temperature regime relevant to those of fusion reactors, as summarized in Table I. They have also been used for perturbing plasmas such as NBI blip experiment, ECH modulation, to conduct detailed physics research on dynamical behavior of plasmas such as in Refs., [11, 12]. ICRF has been playing crucial roles to explore long-pulse operation [13].

Here, present status of these heating systems is described, although all the ICRF antennas have been temporarily removed for smooth initiation of deuterium experiment.

#### 1) NBI

Negative-ion based NBI is an indispensable heating device to modern fusion machine having large plasma size, because longer beam penetration depth is necessary to deposit the beam power at the core part of the larger torus plasmas. In the case of proton/deuteron beam, the neutralization efficiency decreases to zero, when the beam energy increases from 100 keV to 1 MeV. On the other hand, the efficiency of hydrogen/deuterium negative ion ( $H^-/D^-$  ion) is almost constant in that energy range and even at higher energies [14]. For this reason, the negative ion source has been intensively

investigated to adopt the NBI systems [15,16]. The negative-ion based NBI systems have been developed and utilized for the first time to LHD as well as JT-60 [17,18]. Now LHD is the only fusion experiment device equipped with negative-ion based NBI at present.

By means of the developed high transparent accelerator including the slot Grounded Grid (GG) [19,20], intense  $H^-$  beam injection with the current of 37 A ( $340 A/m^2$ ), which is beyond the ITER requirement:  $280 A/m^2$  for  $H^-$  and  $200 A/m^2$  for  $D^-$ , has been achieved [16]. The current density of  $H^-$  ion as a function of beam energy is shown in Fig. 3. The minimum beam divergence of the beams extracted with the accelerator is 5 mrad [21] and is better than that in the case of RF sources.

The other important issues to improve the injection power were the increases of Cs-seeding efficiency and arc efficiency, which is defined as a ratio of accelerated  $H^-$  current to input arc power. In the former case, reduction of the filament current decreases the tungsten evaporation from heated filament and consequently seeded Cs on the ion source walls is kept cleaner and effective to produce  $H^-$  ions. The arc efficiency optimizations for Cs-seeding and magnetic structure improved the injection powers of the other two NBIs and they lead to the stable operation for plasma experiment in LHD.

After the improvements described above, the beam power injected from each negative-ion based NBI increased year by year. The progress of the total beam power of the three NBIs is shown in Fig. 4. The total port-through power was more than the nominal injection power of 15 MW for several years and the maximum power of 16 MW has been achieved with the negative-ion based NBIs in the acceleration of  $H^-$  ion [2,22].

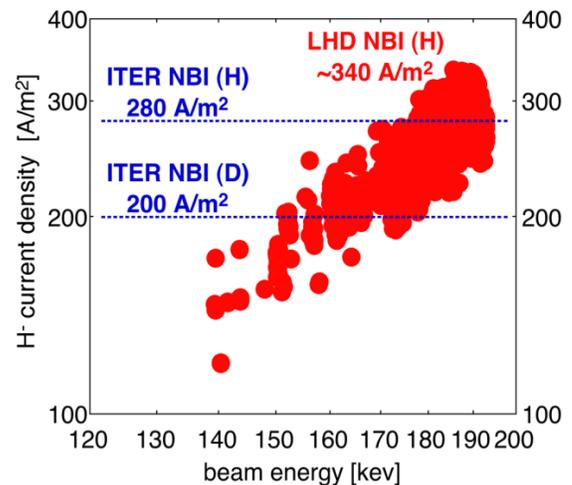


Figure 3  $H^-$  current density obtained with the new beam accelerator as a function of beam energy.

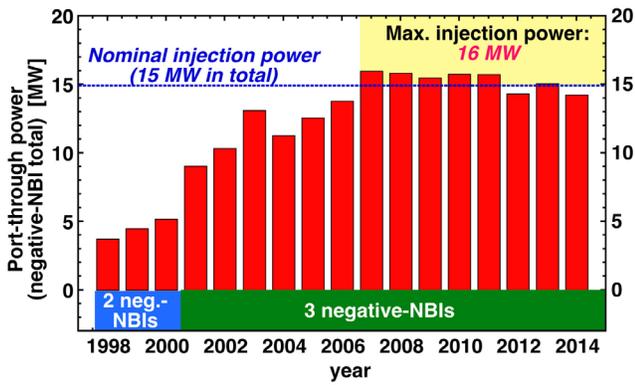


Figure 4 Progress of total port-through beam power obtained with two NBI systems (1998-2000) and three of them (2001-2014). The maximum port-through power of 16 MW was achieved in 2007 and more than 15 MW of the port-through power was obtained several years after the achievement.

In the LHD experimental campaign in 2017, both hydrogen and deuterium injections were conducted for each NBI beamline. The optimal magnetic-field strengths and configurations of negative ion source are different in  $H^-$  and  $D^-$  ion beam operations and it was necessary to tune the field strength without opening the ion source to avoid the degradation of Cs effect and for safe to the radioactivity at NBI beamline. The negative ion sources were fixed to the optimal condition for  $H^-$  ion beam except for the magnetic strength of the residual beam dump, and the characteristic difference of  $H^-$  and  $D^-$  ion beams have been monitored with the same ion-source configuration for comparison. Compared with  $H^-$  beam operation, the  $D^-$  ion current density decreased and electron current density increased as expected.

## 2) ECH

Table III shows the history of the gyrotron development in NIFS. Instead of previous half-MW 84 GHz and 168 GHz gyrotrons, we have started to develop over 1 MW 77 GHz and 154 GHz gyrotrons in collaboration with University of Tsukuba, including some technologies of the 170 GHz ITER gyrotrons of QST (National Institutes for Quantum and Radiological Science and Technology, Japan). After making an agreement on scientific research between NIFS and University of Tsukuba in 2005, the development of 77 GHz MW-gyrotrons was started under the collaboration contract. So far, three 77 GHz and two 154 GHz Mega-Watt gyrotrons have been developed and been

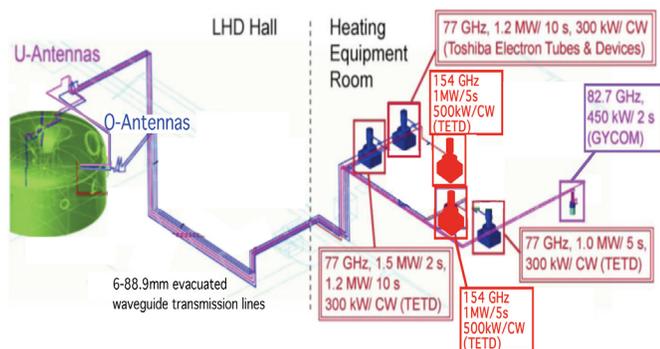


Figure 5 Present configuration of the ECH system in LHD. (cited, Fig. 2 in Ref. [29].)

used for plasma production, electron heating, current drive, and collective Thomson scattering in LHD experiment [23-25]. Recently, a dual-frequency gyrotron (154/115.5 GHz) is being designed and manufactured to expand the possible magnetic configurations for heating [26]. Then over 6 Mega-Watt injection system will be completed in the near future.

Figure 5 shows the latest ECH system in LHD. The system consists of gyrotrons, transmission lines and antennas. The 77 GHz and 154 GHz gyrotrons contribute to the fundamental and second harmonic ECRH at 2.75 T, respectively. The former can also be used at 1.375 T as the second harmonic resonance heating. The transmission lines consist of evacuated corrugated waveguide with 88.9 mm in diameter and several 90-degree miter-bends some of which have the functions as the power monitor, polarizer and arc-detector. All transmission lines are evacuated for high power transmission. Their transmission efficiencies are over 80 %. The injection antennas consist of 2 to 4 mirrors. The final mirror is adjustable to change the focal position in the target plasma [27,28]. Total injection power of 5.5 MW can be injected into LHD plasmas.

TABLE III  
THE HISTORY OF ECH GYROTRON DEVELOPMENT IN NIFS

FY	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017
Injection Power	2.6	2.4	2.6	2.5	3.7	3.7	3.7	4.5	4.6	5.6		5.4	
LHD Experiment	9 th	10 th	11 th	12 th	13 th	14 th	15 th	16th	17th	18th		19th	19th
77 GHz #1	Agreement	Design & Manufacturing	Conditioning	Repair									
77 GHz #2						Upgrade							
77 GHz #3									Upgrade				
154 GHz #1			Design & Manufacturing	Conditioning						Repair			
154 GHz #2					Design	Manufacturing	Conditioning						
154 / 115.5 GHz								Design	Manufacturing	Conditioning			D-exp has been started
Antennas													Antenna re-arrangement

The history of ECH gyrotron development in NIFS for those with over 1 MW 77 and 154 GHz, based on collaboration with University of Tsukuba concluded in 2005. Currently, total injection power of 5.5 MW can be injected into LHD plasmas. A dual-frequency (154/115.5 GHz) gyrotron is being designed and partly manufactured.

## 3) ICH

Fully-controlled stable long-pulse plasma operation is one of the advantageous features for helical systems, and the LHD has demonstrated and extended research in this issue. The long-pulse plasma operations were conducted mainly by ICH with the minority-ion heating scheme and ECH. Heating optimization has been performed in short-pulse plasma duration (<10 s). To sustain long-pulse and high-performance plasma, steady-state heating sources have been improved to be up to 3 MW, and relevant plasma physics with long timescale (> a few thousand seconds) has been investigated by repeated long-pulse plasma operations [30].

A few percent of loss of heating power was a critical issue to make high-performance steady-state plasma duration with heating power in a range of a few MW, and ICRF antenna designs have been investigated to reduce the heating loss associated with parasitic heating at plasma edge and local heat

loads by unfamiliar plasma heating (Fig. 6). The HAS antenna was designed to confirm the field-aligned effect and large wavenumber excitation by phasing dipole to toroidal direction [31], and maximum plasma heating efficiency ( $\eta$ ) of the HAS antenna was obtained with minority ratio of  $\sim 10\%$  in He(H). The FAIT antenna was designed to increase wave power density from the one current strap. However, the wave emitted region of the FAIT antenna was approximately half of that of the HAS antenna, and the impedance transformers were assembled in the FAIT antenna to reduce maximum standing wave voltage (SWV) on transmission lines [32]. Finally, the SWV has decreased to 1/5 with same power supply without the impedance transformer inside of the vacuum vessel. Large amount of RF power could be derived to the FAIT antenna, and RF power density was up to  $9.3 \text{ MW/m}^2$ , which is comparable to the power density of ITER ICRF antenna. Maximum power density is limited by heating sources, and we have been preparing to increase RF power supply using power combiner [32]. Maximum  $\eta$  using the FAIT antenna was achieved with the minority ratio of  $\sim 20\%$  in He(H). Optimized minority concentrations were different between using the HAS antenna and using the FAIT antenna with field-aligned straps, and the optimum concentrations were close using the FAIT antenna and poloidal array (PA) antenna [33], which was designed to increase emitted power from single strap without field-aligned strap.



Figure 6 Two kinds of ICRF antennae in the LHD. Left picture shows a hand shake type antenna (HAS), and right pictures shows a field-aligned impedance transforming antenna (FAIT).

### C. Closed Helical Divertor

The control of the neutral particles using a divertor is one of critical issues for future fusion reactors. The reduction of heat and particle load is also one of the key issues to be resolved. To exploit the inherent advantage of the heliotron concept, that is the built-in helical divertor, a closed helical divertor with baffle structure for high neutral particles compression has been installed in LHD at the inboard side since 2010 [34,35]. The closure had been completed at nine inner toroidal sections in 2013. Since then, the divertor development has been focused on the installation of the divertor cryo-sorption pump for the density control by exhausting the particles highly compressed by the closed helical divertor. Cryo-sorption pumping systems inside the divertor have been installed step by step and now

completed in five sections to demonstrate its functions. Here, it is noteworthy that the development of the divertor cryo-sorption pump has progressed in NIFS [36].

The pumping test of the divertor cryo-sorption pumps were conducted. The pumping speed and pumping capacity was approximately  $70 \text{ m}^3/\text{s}$  and  $58000 \text{ Pa m}^3$ , respectively. The pumping speed has reached to be equivalent to that of the main vacuum pumping system of LHD, and the pumping capacity is equivalent to even 20,000 hydrogen/deuterium pellets. Based on the progress on the closed divertor system, low base density and low efficient global particle confinement time ( $\tau_p^*$ ) are obtained during the divertor pumping as shown in Fig. 7. The low recycling state was obtained by the helical divertor pumping for the first time [37].

The divertor pumping will contribute to long pulse discharges. It is observed that the wall recycling affects the density control in the long pulse discharges in LHD [37]. This powerful divertor pumping will change the global particle balance which does not depend on the wall recycling, leading to good density control. The long pulse discharge will be planned in latter phase of deuterium experiment.

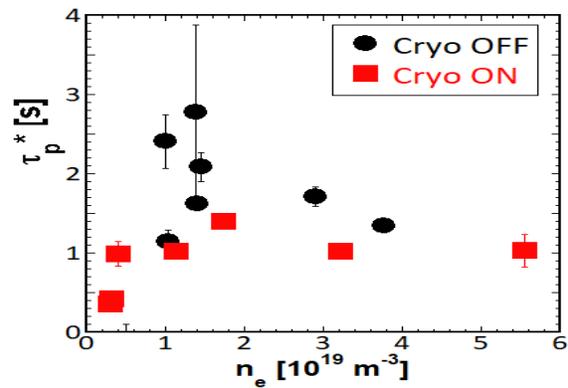


Figure 7 Global particle confinement time ( $\tau_p^*$ ) for various density regime for cases with cryo-sorption pumping OFF (●) and ON (■).

### D. Tritium Removal System

From the viewpoints of tritium safety management and public acceptance, the tritium removal system is one of the key devices to conduct the deuterium plasma experiment in LHD. Since tritium is produced in the LHD vacuum vessel in the deuterium plasma discharge and then exhausted from the vacuum pumping system, the tritium removal system is installed at the downstream of the pumping system. It mainly consists of the catalytic recombiners for the oxidation of hydrogen isotopes gas and hydrocarbons, adsorption column packing with molecular sieves for tritiated water vapor adsorption as shown in Fig. 8. The vacuum exhaust gas under the deuterium plasma experiments has some features; high hydrogen isotopes concentrations more than 50 %, oxygen free, dry gas condition which has a moisture dew point below  $-20^\circ\text{C}$ , various gas flow rate from low flow rate less than few  $\text{Nm}^3/\text{h}$  and temporary large flow rate more than  $10 \text{ Nm}^3/\text{h}$  by the regeneration of cryosorption pumps used in NBI [39]. Therefore, the tritium removal system for LHD has been

designed to treat various gas stream conditions with a safety processing system for hydrogen oxidation.

The maximum amount of tritium production by the deuterium plasma experiment in LHD is assumed to be annually 55.5 GBq. The tritium gas is exhausted from the vacuum vessel with deuterium gas as main operation gas and passed through the tritium removal system. Then, the treated gas from the tritium removal system is released into the environment via the stack after the dilution of room air ventilation gas. Tritium concentration in the stack is monitored by the active tritium sampler [40]. The annual amount of tritium release from the stack must be less than 3.7 GBq according to the agreement with the local governments. Thus, the detritiation factor of the tritium removal system is required higher than 20 corresponding to tritium recovery rate of 95 %.

In the first one month after the start of deuterium plasma experiment, the average tritium concentration in the exhaust gas was about  $3.3 \times 10^{-3}$  Bq/cm<sup>3</sup>. This corresponds to about 11 % of tritium production in vacuum vessel [41]. Tritium concentration in the exhaust gas gradually increases with the number of plasma discharge shots. As the results of initial tritium removal operation, the tritium recovery rate was successfully achieved more than 99.8 % corresponding to the detritiation factor of more than 660.

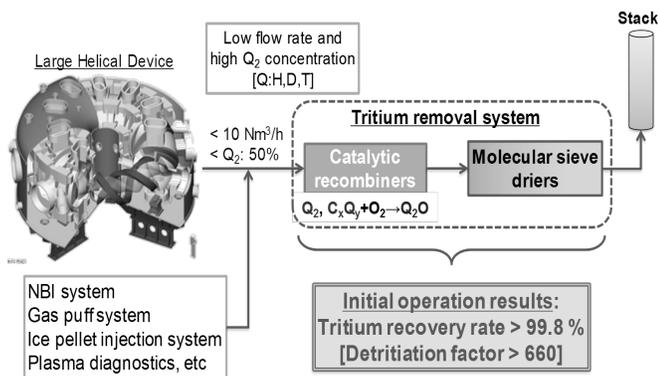


Figure 8 Schematic diagram of tritium removal system: the tritium removal system treats all exhaust gas from LHD and the auxiliary system.

#### IV. LHD ENTERING THE DEUTERIUM EXPERIMENT PHASE

After the conclusion of agreement for the deuterium experiment with local governments in 2013, we have made substantial efforts for accomplishing extensive preparations [42]: not only upgrades of diagnostics and heating devices, but also closed helical divertor, neutron diagnostics system [43], radiation monitoring and safety system, tritium removal system, upgrade of vacuum pumping system and controlled area management system have been upgraded or newly installed.

Then, the LHD deuterium plasma experiment started on March 7, 2017. The first light of the deuterium plasma is shown in Fig. 9. The main objectives for the deuterium experiment are (1) high-performance plasmas through confinement improvement for promoting scientific research in more reactor-relevant conditions, (2) clarification of the isotope effect on confinement, which has been the long-standing mystery in

world fusion research, (3) the demonstration of the confinement capability of energetic ions in heliotron magnetic configuration for obtaining a perspective towards LHD-type helical reactor, and (4) PWI (Plasma-Wall interaction, or PMI: Plasma-Material interaction) study in deuterium plasmas.

Within one week after the start of deuterium experiment, the ion temperature has exceeded 9 keV, which is already beyond the record value in hydrogen experiment phase, 8.1 keV (cf., Table I), and has been approaching the target value: 10 keV. Also, the neutron emission rate measurement has allowed to conduct quantitative research on energetic particles (EPs) confinement, and also on interaction among MHD modes, EPs confinement, and plasma confinement property such as achievable ion temperature. These remarkable progresses being obtained in the on-going deuterium experiment will be reported elsewhere.

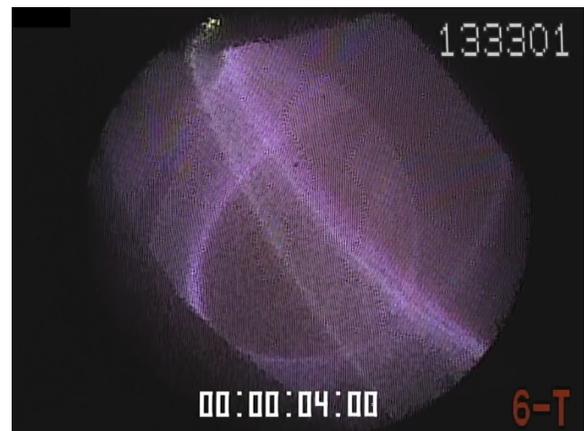


Figure 9 The first light of LHD deuterium plasma on March 7, 2017 (#133301).

#### V. PROGRESS ON CONCEPTUAL DESIGN OF THE LHD-TYPE HELICAL FUSION REACTOR, FFHR-D1

The conceptual design studies on the helical fusion reactor have been intensively conducted by the Fusion Engineering Research Project at NIFS based on close collaboration with LHD experiment. The latest design, FFHR-d1, is four times as large as LHD, and the major radius of the helical coils is 15.6 m [44]. The operation point has been explored by a design integration code, HELIOSCOPE [45], using the “Direct Profile Extrapolation (DPE)” of the LHD plasma parameters [46]. A self-consistently obtained operation secures the energy multiplication factor  $Q \sim 10$ . The confinement improvement in the ongoing deuterium plasma experiments, when confirmed, should lead to the self-ignition ( $Q = \infty$ ).

For the engineering design of FFHR-d1, several innovative ideas have been proposed for the following three purposes: (1) to overcome the difficulties related with the construction and maintenance of three-dimensionally complicated large structures, (2) to enhance the passive safety, and (3) to improve the plant efficiency. They are summarized in Fig. 10. For the superconducting magnet, the high-temperature superconductor (HTS) using ReBCO tapes is considered [47] as an alternate option to the cable-in-conduit conductor using low-temperature

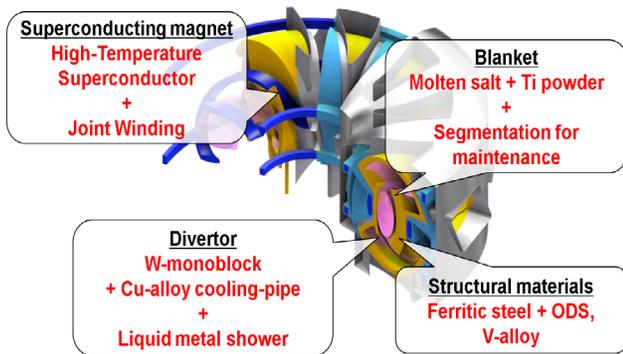


Figure 10 Innovative engineering ideas to realize the helical fusion reactor FFHR-d1.

superconducting  $\text{Nb}_3\text{Sn}$  strands. One of purposes for selecting HTS is to facilitate the three-dimensional winding of helical coils by connecting prefabricated segmented conductors. A mechanical lap joint technique with low joint resistance has been developed at Tohoku University. About 3 m-long short-sample conductor has successfully achieved 100 kA-current at a magnetic field of 5 T and temperature of 20 K.

For the tritium breeding blanket, we have chosen the liquid blanket option with molten salt FLiNaBe (melting point: 580 K) from the view point of passive safety [44]. To increase the hydrogen solubility, an innovative idea was proposed to include powders of titanium [44]. An increase of hydrogen solubility over five orders of magnitudes has been confirmed in an experiment [48], which makes tritium permeation barrier less necessary for the coating on the walls of cooling pipes. The “Oroshhi-2” facility [49] was constructed as a platform for international collaboration, having a twin-loop for testing both molten-salt (FLiNaK) and liquid metal (LiPb) under the perpendicular magnetic field of 3 T. For the structural material of blankets, a dissimilar bonding technique has been developed to join the vanadium alloy, NIFS HEAT2 [50], and a nickel alloy.

For the helical built-in divertor, the divertor tiles are placed at the backside of the blankets where the incident neutron flux is sufficiently reduced by an order of magnitude [51]. It is thus expected that a copper-alloy could be still used for cooling pipes since the maximum neutron fluence is limited to be lower than the allowable limit of  $\sim 1$  dpa for copper within the operation period. It is noted that the peak heat flux on the helical divertor is expected to reach up to  $\sim 20$  MW/m<sup>2</sup> because of the non-uniform strike point distributions, but this heat flux could be still accommodated using copper-alloys for cooling pipes. With direct irradiation of incident neutrons on the divertor tiles, the Reduced-Activation Ferritic/Martensitic (RAFM) steel could be the solution, with which the heat flux should be limited to be lower than  $\sim 5$  MW/m<sup>2</sup> heat load profile. The maintenance scheme for the full-helical divertor is also a critical issue. To solve these problems, a new concept of liquid divertor, REVOLVER-D, has been proposed [52]. Ten units of molten tin shower jets (falls) are proposed to be installed on the inboard side of the torus to intersect the ergodic layer. It is proposed that the vertical flow of Tin jets could be stabilized using metal chains imbedded. This works as an ergodic limiter, and the full-

helical divertor becomes less necessary, although they could, or should, be situated at the rear. Neutral particles are expected to be efficiently evacuated through the gaps between liquid metal showers.

Maintenance is one of the important and difficult issues to realize the helical fusion reactor. For the blanket, a toroidally segmented system, T-SHELL, was proposed [53] divided in every 3 degrees in the toroidal angle. Another new idea is the cartridge-type blanket concept, CARDISTRY-B [54]. The discussion about the maintenance scheme both for the blankets and divertor is ongoing.

## VI. CONCLUDING REMARKS

LHD has progressed as a large-scale superconducting device since 1998, without any severe cryogenic troubles. Improvement of plasma performance and demonstration of steady-state operation has been made based on high-specification and reliable technological and engineering bases as described in this paper.

The deuterium experiment has just been successfully initiated, and will further provide research opportunities in more reactor-relevant regime. It should also make an impact on on-going LHD-type helical reactor design.

The LHD and engineering R&D platforms are highly open to domestic and international collaborators, to which your active participation is anticipated.

## ACKNOWLEDGMENT

The author appreciates all the domestic and international collaborators for their extensive cooperation.

## REFERENCES

- [1] Y. Takeiri, “Extension of Operational Regime of LHD towards Deuterium Experiment,” Presented at 26th IAEA Fusion Energy Conf. (17-22, Oct. 2016, Kyoto, Japan), OV/1-1, and also Y. Takeiri, T. Morisaki, M. Osakabe, M. Yokoyama, S. Sakakibara, et al., “Extension of Operational Regime of LHD towards Deuterium Experiment,” Nucl. Fusion, vol. 57, 102023, 2017.
- [2] Y. Takeiri, O. Kaneko, K. Tsumori, M. Osakabe, et al., “High Performance of Neutral Beam Injectors for Extension of LHD Operational Regime,” Fusion Sci. Technol., vol. 58, pp. 482-488, 2010.
- [3] T. Shimozuma, H. Takahashi, S. Kubo, Y. Yoshimura et al., “ECRH-Related Technologies for High-Power and Steady-State Operation in LHD,” Fusion Sci. Technol., vol. 58, pp. 530-538, 2010.
- [4] T. Mutoh, R. Kumazawa, T. Seki, K. Saito, et al., “ICRF Heating System in LHD,” Fusion Sci. Technol., vol. 58, pp. 504-514, 2010.
- [5] T. Seki, T. Mutoh, K. Saito, H. Kasahara, R. Seki et al., “ICRF Heating Experiment on HD in Foreseeing a Future Fusion Device,” Plasma Fus. Res. vol. 10, 3405046, 2015.
- [6] K. Ida, M. Yoshinuma, M. Osakabe, K. Nagaoka, M. Yokoyama, et al., “Observation of an impurity hole in a plasma with an ion internal transport barrier in the Large Helical Device,” Phys. Plasmas vol. 16, 056111, 2009.
- [7] N. Ohya, T. Morisaki, S. Masuzaki, R. Sakamoto, et al., “Observation of Stable Superdense Core Plasmas in the Large Helical Device,” Phys. Rev. Lett., vol. 97, 055002, 2006.
- [8] S. Imagawa, T. Mito, K. Takahata, S. Yamada, N. Yanagi, et al., “Overview of LHD Superconducting Magnet System and Its 10-Year Operation”, Fusion Sci. Technol., vol. 58, pp. 560-570, 2010.

- [9] T. Mito, R. Maekawa, T. Baba, S. Moriuchi, A. Iwamoto, et al., "Reliable Long-term Operation of the Cryogenic System for the Large Helical Device", *Adv. Cryog. Eng.*, vol. 45, pp. 1253-1260, 2000.
- [10] T. Mito, A. Iwamoto, K. Oba, S. Takami, S. Moriuchi, S. Imagawa, et al., "Renewal of the control system and reliable long-term operation of the LHD cryogenic system", *Physics Procedia*, vol. 67, pp. 77-82, 2015.
- [11] M. Osakabe, S. Murakami, T. Itoh, M. Isobe et al., "Evaluation of Fast-Ion Confinement Using a Rapidly Injected Neutral Beam in LHD," *Plasma Fusion Res.*, vol. 5, S2042, 2010.
- [12] S. Inagaki, T. Tokuzawa, N. Tamura, S. -I, Itoh, T. Kobayashi et al., "How is turbulence intensity determined by macroscopic variables in a toroidal plasma?" *Nucl. Fusion*, vol. 53, 113006, 2013.
- [13] T. Mutoh, R. Kumazawa, T. Seki, K. Saito, H. Kasahara, et al., "Steady-state operation and high energy particle production of MeV energy in the Large Helical Device," *Nucl. Fusion*, vol. 47, pp. 1250-1257, 2007.
- [14] K. H. Berkner, R. V. Pyle and J. W. Stearns, "Intense, mixed-energy hydrogen beams for CTR injection," *Nucl. Fusion*, vol. 15, pp. 249-254, 1975.
- [15] U. Fantz, R. Franzen, W. Kraus, M. Berger, S. Christ-Koch, et al., "Physical performance analysis and progress of the development of the negative ion RF source for the ITER NBI system," *Nucl. Fusion*, vol. 49, 125007, 2009.
- [16] Y. Takeiri, O. Kaneko, K. Tsumori, Y. Oka, K. Ikeda, et al., "High-power and long-pulse injection with negative-ion-based neutral beam injectors in the Large Helical Device," *Nucl. Fusion*, vol. 46, S119, 2006.
- [17] Y. Takeiri, "Negative ion source development for fusion application," *Rev. Sci. Instrum.*, vol. 81, 02B114, 2010.
- [18] T. Inoue, M. Araki, M. Hanada, T. Kurashima, S. Matsuda et al., "Multi-ampere negative hydrogen ion source for fusion application," *Nucl. Instrum. Methods in Phys. Res. B37/38 (1989) 111*.
- [19] O. Kaneko, Y. Takeiri, K. Tsumori, Y. Oka, M. Osakabe, et al., "Engineering prospects of negative-ion-based neutral beam injection system from high power operation for the large helical device," *Nucl. Fusion*, vol. 43, pp. 692-699, 2003.
- [20] K. Tsumori, K. Nagaoka, M. Osakabe, Y. Takeiri, K. Ikeda, O. Kaneko, Y. Oka, T. Kawamoto, E. Asano, M. Sato, and T. Kondo, "High power beam injection using an improved negative ion source for the large helical device," *Rev. Sci. Instrum.*, vol. 75, pp. 1847-1850, 2004.
- [21] K. Tsumori, M. Osakabe, Y. Takeiri, O. Kaneko, K. Nagaoka, et al., "Beamlet characteristics in the accelerator with multi-slot grounded grid," *Rev. Sci. Instrum.*, vol. 81, 02B117, 2010.
- [22] M. Kasaki et al., "Progress of Experimental Study on Negative Hydrogen Ion Production and Extraction," Presented at 26th IAEA Fusion Energy Conf., (17-22, Oct. 2016, Kyoto, Japan), FIP/1-4.
- [23] H. Takahashi, T. Shimozuma, S. Kubo, S. Ito, S. Kobayashi, et al., "The Development of a 77-GHz, 1-MW ECRH System for the Large Helical Device," *Fusion Sci. Technol.*, vol. 57, pp. 19-26, 2010.
- [24] H. Takahashi, T. Shimozuma, S. Ito, S. Kubo, Y. Yoshimura, et al., "High Power and High Efficiency Operation of 77 GHz Gyrotrons by Stepwise Raising of the Anode Voltage," *Plasma Fus. Res.*, vol. 7, 1205154, 2012.
- [25] T. Kariya, R. Minami, T. Imai, T. Shimozuma, S. Kubo, et al., "Development of 154 GHz 1 MW Gyrotron For ECRH of LHD," *Transactions of Fusion. Sci. Technol.*, vol. 63, pp. 265-267, 2013.
- [26] T. Kariya, T. Imai, R. Minami, K. Sakamoto, Y. Oda, et al., "Development of over-MW gyrotrons for fusion at 14 GHz to sub-THz frequencies," *Nucl. Fusion*, vol. 57, 066001, 2017.
- [27] H. Takahashi, T. Shimozuma, S. Kubo, Y. Yoshimura, H. Igami, et al., "Extension of high Te regime with upgraded electron cyclotron resonance heating system in the Large Helical Device," *Phys. Plasmas*, vol. 21, 061506, 2014.
- [28] K. Okada, M. Nishiura, S. Kubo, T. Shimozuma, Y. Yoshimura, et al., "Development of fast steering mirror control system for plasma heating and diagnostics," *Rev. Sci. Instruments*, vol. 85, p.11E811, 2015.
- [29] Y. Yoshimura, H. Kasahara, M. Tokitani, R. Sakamoto, Y. Ueda, et al., "Progress of long pulse discharges by ECH in LHD," *Nucl. Fusion*, vol. 56, 046005, 2016.
- [30] H. Kasahara, Y. Yoshimura, K. Nagasaki, M. Tokitani, N. Ashikawa, et al., "Progress of High-Performance Steady-State Plasma and Critical PWI Issue in LHD", Presented at 25th IAEA Fusion Energy Conf. (13-18, Oct. 2014, St. Petersburg, Russian Federation), EX/7-3.
- [31] H. Kasahara, T. Seki, K. Saito, R. Seki, R. Kumazawa, et al., "Development of steady-state operation using ion cyclotron heating in the Large Helical Device", *Phys. Plasmas*, vol. 21, 061505, 2014.
- [32] K. Saito, T. Seki, H. Kasahara, R. Seki, S. Kamio, et al., "Field-aligned-impedance-transforming ICRF antenna in the LHD," *Fusion Eng. Des.*, vol. 96-97, pp. 583-588, 2015.
- [33] T. Mutoh, R. Kumazawa, T. Seki, K. Saito, H. Kasahara, et al., "ICRF Heating System in LHD," *Fusion Sci. Technol.*, vol. 58, pp. 504-514, 2010.
- [34] S. Masuzaki, M. Kobayashi, M. Shoji, M. Tokitani, T. Morisaki, et al., "Neutral Gas Compression in the Helical Divertor with a Baffle Structure in the LHD Heliotron," *Plasma Fusion Res.*, vol. 6, 1202007, 2011.
- [35] T. Morisaki, S. Masuzaki, M. Kobayashi, M. Shoji, J. Miyazawa, et al., "Initial experiments towards edge plasma control with a closed helical divertor in LHD," *Nucl. Fusion*, vol. 53, 063014, 2013.
- [36] T. Murase, G. Motojima, H. Tanaka, T. Morisaki, M. Mita, "Development of New Concept In-Vessel Cryo-Sorption Pump for LHD Closed Helical Divertor," *Plasma Fusion Res.*, vol. 11, 1205030, 2016.
- [37] G. Motojima, S. Masuzaki, H. Tanaka, T. Morisaki, R. Sakamoto et al., to be submitted to *Nucl. Fusion*.
- [38] G. Motojima, S. Masuzaki, M. Tokitani, N. Yoshida, M. Yajima et al., "Global particle balance and its relationship with the plasma wall interaction emerging in long pulse discharges on the Large Helical Device", submitted to *Nucl. Fusion*.
- [39] M. Tanaka, N. Suzuki, H. Kato, T. Kondo and the LHD Upgrade Team, "Observations of the gas stream from the Large Helical Device for the design of an exhaust detritiation system," *Plasma Fusion. Res.*, vol. 11, 2405055, 2016.
- [40] M. Tanaka, H. Kato, Y. Yamamoto, C. Iwata, "Development of an active tritium sampler for discriminating chemical forms without the use of combustion gases in a fusion test facility," *Appl. Radiat. Isot.*, vol. 125, pp. 53-59, 2017.
- [41] M. Tanaka, N. Suzuki, H. Kato, "Preliminary operation results of exhaust detritiation system for large fusion test device," to be presented at the 2nd Asia-Pacific Symposium on Tritium Science (APSOT-2), California, USA, Sep. 5-8, 2017.
- [42] M. Osakabe, et al., "Preparation and commissioning for the LHD deuterium experiment," Presented at 27th IEEE Symposium on Fusion Engineering (4 – 8 July 2017, Shanghai, China), R.OP4-1.
- [43] M. Isobe, et al., "Neutron Diagnostics in the Large Helical Device," Presented at 27th IEEE Symposium on Fusion Engineering (4 – 8 July 2017, Shanghai, China), R.OP1-1.
- [44] A. Sagara, H. Tamura, T. Tanaka, J. Miyazawa, T. Goto, et al., "Helical reactor design FFHR-d1 and c1 for steady-state DEMO", *Fusion Eng. Des.*, vol. 89, pp. 2114-2120, 2014.
- [45] T. Goto, J. Miyazawa, R. Sakamoto, Y. Suzuki, C. Suzuki, et al., "Development of a real-time simulation tool towards self-consistent scenario of plasma start-up and sustainment on helical fusion reactor FFHR-d1," *Nucl. Fusion* vol. 57, 066011, 2017.
- [46] J. Miyazawa, T. Goto, T. Morisaki, M. Goto, R. Sakamoto et al., "Direct extrapolation of radial profile data to a self-ignited fusion reactor based on the gyro-Bohm model", *Fusion Eng. Des.*, vol. 86, 2879-2886, 2011.
- [47] N. Yanagi, S. Ito, Y. Terazaki, Y. Seino, S. Hamaguchi, et al., "Design and development of high-temperature superconducting magnet system with joint-winding for the helical fusion reactor", *Nucl. Fusion*, vol. 55, 053021, 2015.
- [48] J. Yagi, A. Sagara, T. Watanabe, T. Tanaka, S. Takayama, and T. Muroga, "Hydrogen solubility in FLiNaK mixed with titanium powder", *Fusion Eng. Des.*, 98-99, pp. 1907-1901, 2015.

- [49] A. Sagara, T. Tanaka, J. Yagi, M. Takahashi, K. Miura, et al., “First operation of the FLiNaK/LiPb twin loop Oroshhi-2 with a 3T SC magnet for R and D of liquid blanket for fusion reactor”, *Fusion Sci. Tech.*, vol. 68, pp. 303-307, 2015.
- [50] T. Muroga, T. Nagasaka, A. Iiyoshi, et al., “NIFS program for large ingot production of a V–Cr–Ti alloy,” *J. Nucl. Mater.*, vol. 283-287, p.711-715, 2000.
- [51] T. Tanaka, A. Sagara, S. Masuzaki, et al., “Analysis of radiation environment at divertor in helical reactor FFHR-d1”, *Fusion Eng. Des.*, 89, pp. 1939-1943, 2014.
- [52] J. Miyazawa, et al., “Conceptual design of a liquid metal limiter/divertor system for the FFHR-d1” in press in *Fusion Eng. Des.* (2017).
- [53] T. Goto, J. Miyazawa, H. Tamura, T. Tanaka, N. Yanagi, A. Sagara and the FFHR Design Group, “Proposal for the method of maintaining breeder blankets in the LHD-type helical fusion reactor FFHR”, *Plasma Fusion Res.*, vol. 11, 2405047, 2016.
- [54] J. Miyazawa, H. Tamura, T. Tanaka, T. Murase, T. Goto, et al., “Cartridge-type helical blankets aiming at easy construction and maintenance for the FFHR-d1”, *Plasma Fusion Res.*, vol. 12, 1405017, 2017.



**Y. Takeiri** was born in 1957. He received the Ph.D. degree in engineering from Kyoto University in 1988. From 1985 to 1987, he joined the Heliotron-E project in Kyoto University, and in 1988, he contributed to the foundation of NIFS (National Institute for Fusion Science) as a member of the Planning Office. After he

moved to NIFS from Kyoto University, he engaged in construction and development of LHD (Large Helical Device) and NBI system for the start of LHD operation in 1998. He was appointed to the Executive Director of Large Helical Device Project (on Device) in 2010, and then, to the Director-General in 2015 (to the present). Recent awards he has received are:

- The Commendation for Science and Technology by the Minister of Education, Culture, Sports, Science and Technology, Prizes for Science and Technology, Research Category, “Study on achievement of high-ion temperature plasma relevant to fusion reactor by advanced plasma heating” (2014), and
- NIBS Award, The Negative Ion Source Prize in the 5th International Symposium on Negative Ions, Beams and Sources (NIBS2016), “For significant contributions regarding the diagnostics, and theoretical & applied physics of beam sources for negative ion based neutral beam injectors” (2016).