

Estimation of the Fast-Ion Anisotropy Effect on the Neutron Source Intensity Measurement and the Experimental Observation

journal or publication title	IEEE Transactions on Plasma Physics
volume	47
number	1
page range	12-17
year	2018-07-02
URL	http://hdl.handle.net/10655/00012856

doi: 10.1109/TPS.2018.2846776



Estimation of the fast ion anisotropy effect on the neutron source intensity measurement and the experimental observation

Takeo Nishitani, Hideaki Matsuura, Neng Pu, Kunihiro Ogawa, Hiroki Kawase, Mitsutaka Isobe, and the LHD Experiment Group

Abstract—In the Large Helical Device (LHD) deuterium plasma experiment, the neutron emission rate and the shot-integrated neutron yield are measured with the neutron flux monitor (NFM) and the neutron activation system (NAS), respectively, where the neutron emission is assumed to be isotropic in the plasma. The differential cross-section of the $D(d,n)^3\text{He}$ reaction has a large anisotropy for the forward direction of the incident deuteron direction. LHD has intensive tangential neutral beam injectors (NBIs), which may cause an anisotropic neutron emission in the plasma. The angular distribution of the neutron emission is calculated from the fast ion distribution function evaluated by a code which solves Fokker-Plank equations for the 180 keV tangential NBI. The effect of the anisotropic neutron emission on the NFM and NAS measurements is estimated by MCNP calculations. Also the effect is confirmed experimentally. The neutron emission rate measured with the NFM near the equatorial port is about 10% larger than that with the NFM at the top of the LHD center axis. The shot integrated neutron yield measured with NAS is 25% larger than that with NFM at the top of the LHD center axis in the case of the tangential NB injection, which is consistent with the MCNP calculation.

Index Terms—LHD, neutron anisotropy, fast ion anisotropy, neutron flux monitor, neutron activation system, Fokker-Plank calculation, MCNP.

I. INTRODUCTION

THE Large Helical Device (LHD) started deuterium plasma experiments in March 2017 [1]. The neutron measurement is one of the most important diagnostics on the deuterium experiment, not only for the plasma performance understanding but also the radiation safety. In the LHD deuterium plasma experiment, the neutron emission rate and the shot-integrated

Manuscript received December 26, 2017; revised April, 12, 2018. Date of publication MM DD, 2018. This work was supported by the LHD project budgets ULHH003 and ULGG801. This work was partly performed with the support and under the auspices of the NIFS Collaboration Research program NIFS17KLP029. (Corresponding author: Takeo Nishitani)

Take Nishitani is with the National Institute for Fusion Science (NIFS), 322-6 Oroshi-cho, Toki 509-5292, Japan (e-mail: nishitani.takeo@nifs.ac.jp).

Hideaki Matsuura is with Kyushu University, 744 Motoooka, Nishi-ku, FuFukuoka 819-0395, Japan.

Neng Pu and Hiroki Kawase are with The Graduate University for Advanced Studies (SOKENDAI), 322-6 Oroshi-cho, Toki- 509-5292, Japan.

Kunihiro Ogawa and Mitsutaka Isobe are with NIFS and SOKENDAI.

neutron yield are measured with the neutron flux monitor (NFM)[2, 3] and the neutron activation system (NAS)[4], respectively. The detection efficiencies of the NFM detectors and the reaction rate of an Indium foil for NAS were calibrated by ^{252}Cf neutron source rotating inside the LHD vacuum vessel [4, 5], where the neutron emission is assumed to be isotropic. LHD has two perpendicular neutral beam injectors (NBIs) with the typical energy of 60-80 keV and three tangential NBIs with the typical energy of 180 keV. The differential cross-section of the $T(d,n)^3\text{He}$ reaction is almost isotropic. On the other hand, the differential cross-section of the $D(d,n)^3\text{He}$ reaction has a large anisotropy for the forward direction of the incident deuteron direction as shown Fig.1 In particular, the anisotropy is enhanced for the incident deuteron energy larger than 100 keV. Therefore, the intensive tangential NBI may cause an anisotropic neutron emission in the plasma on LHD.

The effect of the neutron emission on the NAS measurement was evaluated by the MCNP calculation for the TEXTOR tokamak previously [6]. In the present work, the effect of the anisotropic neutron emission not only on the NAS measurements and but also NFM is investigated by the MCNP-6 [7] calculation. Also, the anisotropic neutron emission effects have been confirmed on the LHD deuterium plasma experiment.

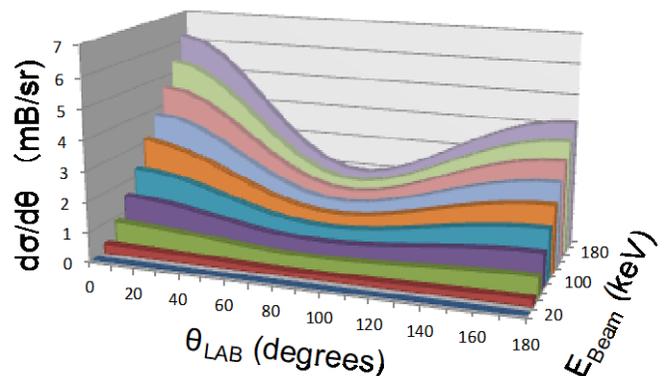


Fig. 1. Differential cross-section of the $D(d,n)^3\text{He}$ reaction for the different deuteron beam energy.

II. NEUTRAL BEAM INJECTORS AND NEUTRON DIAGNOSTICS

A. Neutral beam injectors

Fig. 2 shows the schematic view of NBIs [8], NFM, and irradiation ends of NAS on LHD. NBI#1, #2, and #3 are tangential direction injectors with negative-ion sources whose typical energy is 180 keV. NBI#4 and #5 are perpendicular direction injectors with positive-ion sources whose typical energies are 60 keV and 80 keV, respectively. The normal direction of the toroidal magnetic field is counterclockwise viewed from above. Therefore, NBI#1 and #3 are counter-direction injection to the toroidal magnetic field, and NBI#2 is a co-direction injection to the toroidal magnetic field direction.

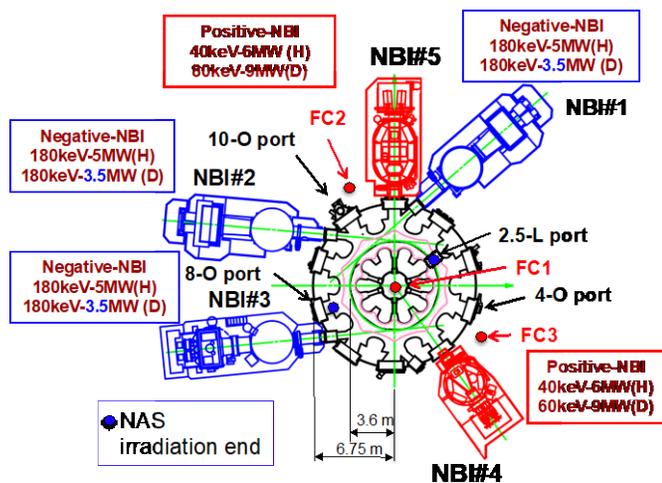


Fig. 2. Arrangement of NBIs, NFM, and irradiation ends of NAS on LHD.

B. Neutron flux monitors

The absolute neutron emission rate has been measured with NFM, which consists of ^{235}U fission chambers and additional highly sensitive neutron detectors of a ^{10}B proportional counter or a ^3He proportional counter. For plasmas with NB injection, ^{235}U fission chambers only are available, because highly sensitive neutron detectors are saturated. The locations of three ^{235}U fission chambers, FC1-FC3, are shown in Fig. 2. FC1 is on the top of the center axis. FC2 and FC3 are near two large outside ports called O-port. In this study, precise position of the detectors is important. Therefore, the center positions of three ^{235}U fission chambers are listed in TABLE I.

TABLE I
CENTER POSITIONS OF ^{235}U FISSION CHAMBERS

Detector	Height from the LHD magnetic axis	Toroial position (+:Counter CW)
FC1	5.48 m	Center of LHD axis
FC2	0 m	-14.5° from 10-0 axis
FC3	0m	-15.0° from 4-0 axis

The ^{235}U fission chamber is surrounded by a 50-mm-thick polyethylene moderator and a 1-mm-thick cadmium thermal neutron absorber. The fission event of ^{235}U has large

cross-section for thermal neutrons, which are generated in the concrete wall and surrounding equipment through slowing down process. In order to prevent the contribution of those thermal neutrons to the fission chamber signal, the cadmium thermal neutron absorber is employed. The detector has rather flat response for the neutron energy of 0.1 – 2 MeV as shown in Fig. 3 [3], which is suitable to the total neutron yield measurement not only for 2.45 MeV neutrons but also neutrons scattered by the LHD structure.

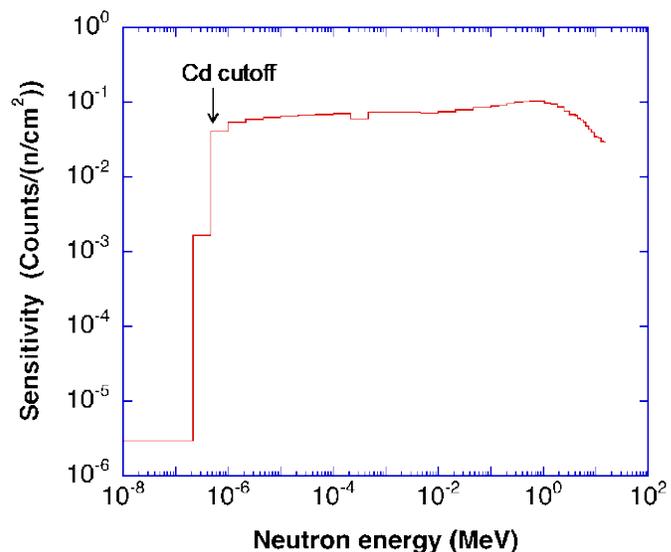


Fig. 3. Response function of the ^{235}U fission chamber with a 50-mm-thick polyethylene moderator and a 1-mm-thick cadmium thermal neutron absorber.

C. Neutron activation system

A neutron activation system is widely used in fusion experimental devices [9-11] for the shot-integrated neutron yield measurement. A piece (or pieces) of metal called activation foil is transferred to an irradiation end near the plasma by a pneumatic tube before the plasma shot. After the shot, the activation foil will return to the counting station, where gamma-rays from the activation foil is measured with a gamma-ray spectrometer such as a high-purity germanium detector. If the irradiation end is close to the plasma, the activation foil can measure direct neutrons from the plasma mainly.

LHD has a neutron activation system with two irradiation ends [4]. One is in an O-port, and another is in a lower vertical port called L-port as shown in Fig. 4. Those locations of the irradiation ends are not so close to the plasma due to the complicated helical plasma configuration and the mechanical structure issue of the irradiation end such as the vibration of the cantilever type transfer tube. The distances between the irradiation ends and the typical plasma center, where the major radius of the plasma axis is 3.6 m, are 1.7 m and 2.7 m for the irradiation end in the 8-0 port and the 2.5-L port, respectively. Thus, the activation foil in the 2.5-L port is less sensitive to the total neutron yield than that in the 8-0 port.

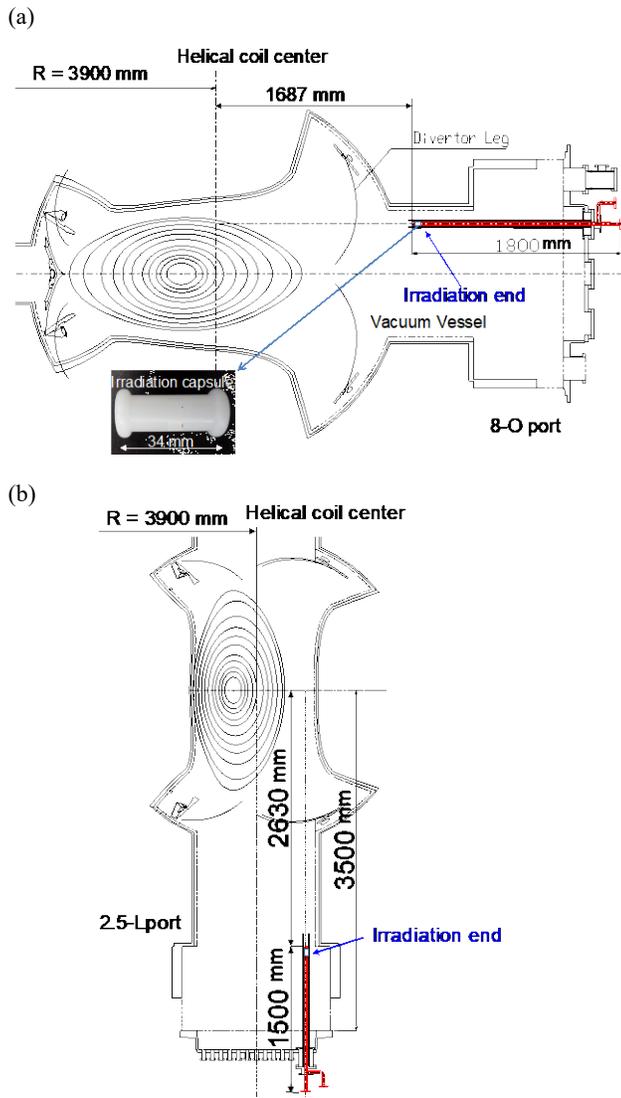


Fig. 4. Schematic view of the irradiation ends in LHD. (a) is in the 8-O port and (b) is in the 2.5-L port.

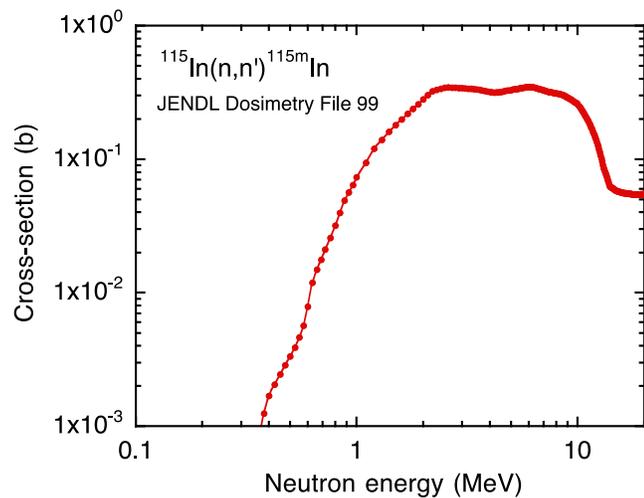


Fig. 5. Cross-section of $^{115}\text{In}(n,n')^{115\text{m}}\text{In}$ reaction as a function of neutron energy from the JENDL Dosimetry File 99 [12].

By selecting the kind of foil material and the nuclear reaction, neutrons with certain energy range can be measured with NAS. The nuclear reaction of $^{115}\text{In}(n,n')^{115\text{m}}\text{In}$ is employed for the measurement of the total neutron yield from the deuterium plasma in LHD. Figure 5 shows the cross-section of $^{115}\text{In}(n,n')^{115\text{m}}\text{In}$ as a function of neutron energy, which has a threshold energy of 0.336 MeV and rather flat response in the energy range of 1.5-10 MeV [12]. The activated nucleus of $^{115\text{m}}\text{In}$ has a half-life of 4.486 h, which is suitable for the shot-integrated neutron yield measurement even at one hour shot of LHD.

III. ESTIMATION OF FAST ION VELOCITY DISTRIBUTION FUNCTION AND THE ANGULAR DISTRIBUTION OF THE NEUTRON EMISSION

At first, the fast ion velocity distribution function is evaluated by the Fokker-Plank calculation [13] for the tangential NBI with the beam energy of 180 keV and the beam power of 1 MW, where bulk plasma parameters are assumed to be electron temperature T_e of 2 keV, electron density n_e of $2 \times 10^{19} \text{ m}^{-3}$, the particle confinement time τ_p of 0.2 s, and the energy confinement time τ_E of 0.2 s. Fig. 6 shows calculated fast ion velocity distribution function, where average velocity of deuterons v_0 is assumed to be the velocity for 60 keV deuteron. It is found that fast ion velocity distribution function has an intensive anisotropy toward the v_{\parallel} direction (tangential direction).

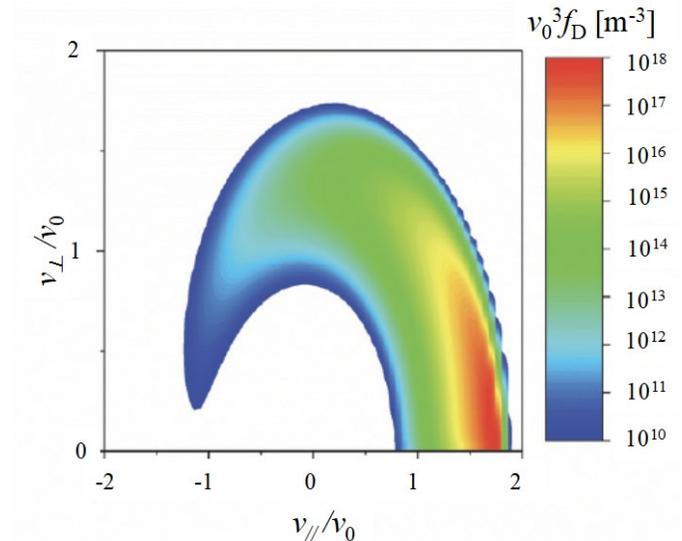


Fig. 6. Calculated velocity distribution function for the tangential NBI with the beam energy of 180 keV and the beam power of 1 MW.

The angular distribution of neutrons from reactions between fast ions and bulk ions is calculated by using the fast ion velocity distribution shown in Fig. 6 and the differential cross-section of $\text{D}(d,n)^3\text{He}$ reaction shown in Fig. 1. As shown in Fig. 7, neutrons from fast ions and bulk ions have large anisotropy. The relative intensity is approximately 0.35 and 0.55 at the emission angle of 90 degrees and 180 degrees against that of 0 degree, respectively.

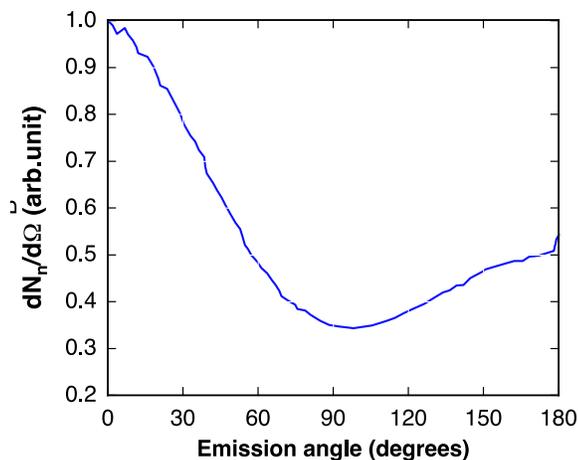


Fig. 7. Calculated angular distribution of the neutron emission from reactions between fast ions and bulk ions. The values are normalized to that at 0 degree.

IV. EFFECT OF ANISOTROPIC NEUTRON EMISSION ON NEUTRON SOURCE INTENSITY MEASUREMENT ESTIMATED BY NEUTRONICS CALCULATION

The detection efficiencies of the ^{235}U fission chambers of NFM and the reaction rate of an Indium foil for NAS are calculated by the MCNP-6 code [7] with the nuclear data library of FENDL-3.0 [14]. The three-dimensional calculation model includes not only LHD but also the torus hall building in order to take account of the neutrons scattered by the torus hall walls. The helical coils and the casing for the coils are divided by 6° toroidal angle pitch, and those components are assumed to be toroidally symmetric in a toroidal pitch angle [3]. Fig. 8 shows the schematic view of the MCNP calculation model, which is drawn with SuperMC/MCAM code [15].

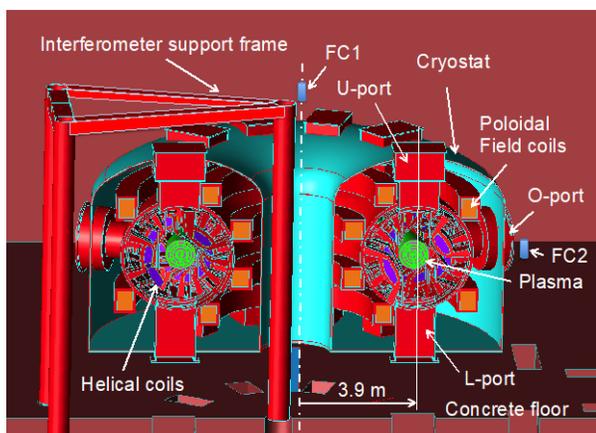


Fig. 8. Three-dimensional model of LHD including the torus hall building.

The LHD plasma is modeled by a simple torus, which is divided 60 toroidal sectors with the toroidal pitch angle of 6 degrees. The angular distribution of the neutron emission is defined at each plasma sector according to the angular distribution of neutrons shown in Fig.7. The source neutron energy is assumed to be mono-energetic of 2.45 MeV.

The detection efficiencies of the ^{235}U fission chambers are derived from the product of the response function shown in Fig.3 and the calculated neutron spectra at the detector location. The result is summarized in TABLE II. FC1 is almost insensitive to the anisotropy, however, FC2 and FC3 has small sensitivity to the anisotropy.

TABLE II
DETECTION EFFICIENCIES OF ^{235}U FISSION CHAMBERS

Detector	Detection efficiency ($\times 10^{-8}$ /source neutron)		Anisotropic
	Isotropic source	Anisotropic source	Isotropic
FC1	0.583 ± 0.006	0.582 ± 0.006	0.998 ± 0.014
FC2	1.08 ± 0.01	1.11 ± 0.01	1.03 ± 0.01
FC3	0.689 ± 0.008	0.694 ± 0.008	1.01 ± 0.02

Also, the reaction rate of $^{115}\text{In}(n,n')^{115\text{m}}\text{In}$ is calculated by MCNP using the nuclear data library for two irradiation ends. The reaction rate R is defined as follows,

$$R = \int \sigma(E)\phi(E)dE \quad (1)$$

where $\sigma(E)$ is the cross-section and $\phi(E)$ is the neutron energy spectrum. Here, the nuclear data library of JENDL 99 Dosimetry file [12] is used for the R calculation, which is specially compiled for the activation measurement. The result is summarized in TABLE III. The reaction rate at the irradiation end in the 8-0 port for the anisotropic source is 25% larger than that for isotropic source. The statistical error of the reaction rate is still large in the case of the 2.5-L port, because the position is far from the plasma and the volume of the irradiation capsule is very tiny. However, it seems that the reaction for the anisotropic source is 10-20% smaller than that for the isotropic source.

TABLE III
REACTION RATES OF $^{115}\text{In}(n,n')^{115\text{m}}\text{In}$ AT THE IRRADIATION ENDS

Position	Reaction rate ($\times 10^{-31}$ /source neutron)		Anisotropic
	Isotropic source	Anisotropic source	Isotropic
8-O	1.77 ± 0.006	2.22 ± 0.17	1.25 ± 0.17
2.5-L	0.622 ± 0.116	0.484 ± 0.101	0.778 ± 0.217

V. EXPERIMENTAL OBSERVATION

The fast ion anisotropy effect on NFM is investigated in the shot shown in Fig.9, where tangential NBIs were injected from 3.3 s to 7.3 s and perpendicular NBIs were injected from 7.3 s to 9.3 s. The total neutron yields S_n measured with FC2 and FC3 are almost identical, and larger than that with FC1 in the phase of the tangential NB injections. We employed FC1 as the reference detector, because the detector is considered to be the most insensitive to the anisotropy of the neutron emission by the result of the neutronics analyses in Section IV. The ratios of FC2/FC1 and FC3/FC1 are approximately 1.1 in the phase of the tangential NB injections, which indicates that anisotropy of fast ions injected by tangential NBIs are confirmed experimentally through the anisotropy in the neutron mission. However, those ratios are much larger than the MCNP simulation. Further discussion is required.

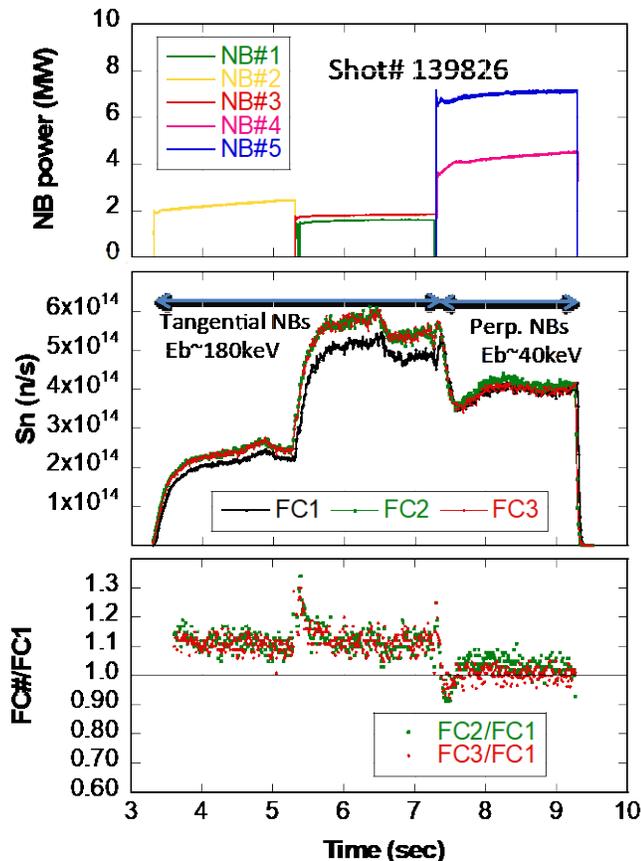


Fig. 9. Time evolution of the neutron emission rate measured with FC1, 2, and 3, and the ratios of FC2/FC1 and FC3/FC2 for different NB injections.

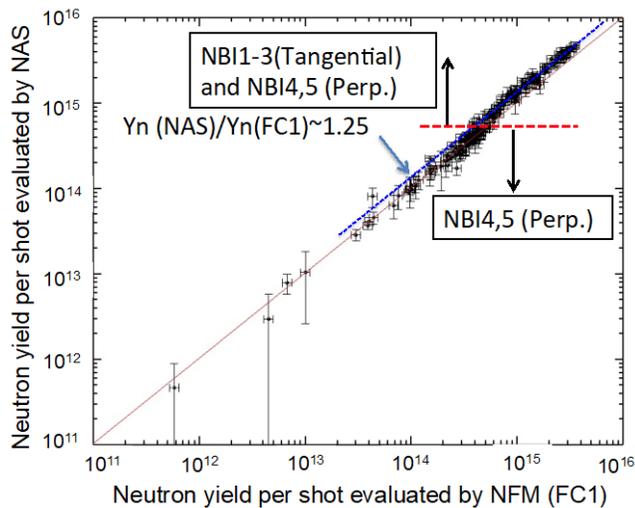


Fig. 10. Shot integrated neutron yield measured with NAS at 8-O port as a function of that with FC1 of NFM.

Fig. 10 shows the shot integrated neutron yield measured with the NAS measurement in the 8-O port as a function of that with FC1 of NFM. For the perpendicular NBI, the shot integrated neutron yield measured with NAS is coincide with that by NFM, however, is 25% larger than that by NFM for the plasma with

tangential NBIs, which is consistent with the MCNP calculation. Unfortunately, we did not have sufficient data in the 2.5-L port until now. In the next LHD campaign, we will accumulate the data of the NAS measurement in the 2.5-L port.

VI. EXPERIMENTAL OBSERVATION

The angular distribution of the neutron emission is calculated from the fast ion distribution function evaluated by the Fokker-Plank code for the 180 keV tangential NBI. The effects of the neutron emission anisotropy on the neutron yield measurement are estimated by the MCNP calculation. The neutron emission rate measured FC2 and FC3 are about 10% larger than that with FC1, which are much larger than the MCNP simulation. The shot integrated neutron yield measured with NAS is 25% larger than that by NFM (FC1) for the plasma with tangential NBIs, which is consistent with the MCNP calculation. Thus, we confirmed the effect of the fast ion anisotropy effect on the neutron source intensity measurement experimentally. Previously, we consider that NAS is the most accurate direct measurement of the shot-integrated neutron yield. However, we should consider the fast ion anisotropy effect on NAS. Also, we should take account of the fast ion anisotropy effect in the interpretation of the NFM data.

ACKNOWLEDGMENT

One of us (T.N.) would like to thank Drs. M. Ishikawa and T. Shimada for their support of the SuperMC/MCAM usage.

REFERENCES

- [1] M. Osakabe, Y. Takeiri, T. Morisaki, G. Motojima, K. Ogawa, M. Isobe, M. Tanaka, S. Murakami, A. Shimizu, K. Nagaoka, H. Takahashi, K. Nagasaki, H. Takahashi, T. Fujita, Y. Oya, M. Sakamoto, Y. Ueda, T. Akiyama, H. Kasahara, S. Sakakibara, R. Sakamoto, M. Tokitani, H. Yamada, M. Yokoyama, Y. Yoshimura & LHD Experiment Group, "Current Status of Large Helical Device and Its Prospect for Deuterium Experiment," *Fusion Sci. Technol.*, vol. 72, 2017, pp. 199-210.
- [2] M. Isobe, K. Ogawa, H. Miyake, et al., "Wide dynamic range neutron flux monitor having fast time response for the Large Helical Device," *Rev. Sci. Instrum.*, vol. 85, 2014, 11E114.
- [3] T. Nishitani, K. Ogawa, and M. Isobe, "Monte Carlo simulation of the neutron measurement for the Large Helical Device deuterium experiments," *Fusion Eng. Design*, 123, 2017, pp.1020-1024.
- [4] N. Pu, T. Nishitani, M. Isobe, K. Ogawa, H. Kawase, T. Tanaka, S. Li, S. Yoshihashi, and A. Uritani, "In situ Calibration of Neutron Activation System on the Large Helical Device," *Rev. Sci. Instrum.*, vol. 88, 2017, 113302.
- [5] T. Nishitani, K. Ogawa, M. Isobe, H. Kawase, N. Pu, Y. Kashchuk, V. Krasilnikov, J. Jo, M. Cheon, T. Tanaka, S. Yoshihashi, S. Li, M. Osakabe, and the LHD Experiment Group, "Neutron Calibration Experiment and the Neutronics Analyses for the Deuterium Plasma Experiments on LHD," submitted to *Fusion Eng. Design*.
- [6] B. Wolle, G. Beikert, and F. Gadelmeier, "Effect of anisotropic D-D fusion neutron emission on counter calibration using activation techniques," *Nucl. Instrum. Meth. A*, vol. 424, 1999, pp. 561-568.
- [7] D. Pelowitz (Ed.), "MCNP6 Users Manual, LA-CP-13-00634," Los Alamos National Laboratory, Los Alamos, NM, USA, 2013.
- [8] Y. Takeiri, O. Kaneko, K. Tsumori, M. Osakabe, K. Ikeda, K. Nagaoka, H. Nakano, E. Asano, T. Kondo, M. Sato, M. Shibuya, S. Komada & LHD Experiment Group, "High performance of neutral beam injectors for extension of LHD operational regime," *Fusion Sci. Technol.*, vol. 58, 2010, pp. 482-488.

- [9] C.W. Barnes and A.R. Larson, "Measurements of DT and DD neutron yields by neutron activation on the Tokamak Fusion Test Reactor" *Rev. Sci. Instrum.*, vol. 66, 1995, pp. 888-890.
M. Hoek, T. Nishitani, M. Carlsson, and T. Carlsson, "Triton burnup measurements by neutron activation at JT-60U," *Nucl. Instrum. Math. A*, 368, 1996, 804-814.
- [10] M. Hoek, T. Nishitani, M. Carlsson, and T. Carlsson, "Triton burnup measurements by neutron activation at JT-60U," *Nucl. Instrum. Math. A*, 368, 1996, 804-814.
- [11] L. Bertalot, A. L. Roquemore, M. Loughlin, and B. Esposito, "Calibration of the JET neutron activation system for DT operation," *Rev. Sci. Instrum.*, vol. 70, 1999, pp. 1137-1140.
- [12] K. Kobayashi, T. Iguchi, S. Iwasaki, T. Aoyama, S. Shimakawa, Y. Ikeda, N. Odano, K. Sakurai, K. Shibata, T. Nakagawa, and M. Nakazawa, "JENDL Dosimetry File 99 (JENDL/D-99)," Japan Atomic Energy Research Institute, JAERI 1344, Tokai, Ibaraki, Japan, 2002.
- [13] H. Matsuura and Y. Nakao, "Modification of alpha-particle emission spectrum in beam-injected deuterium-tritium plasmas," *Physics of Plasmas*, 16, 2009, 042507. [Online].
- [14] R. A. Forrest, R. Capote, N. Otsuka, T. Kawano, A.J. Koning, S. Kunieda, J-Ch. Sublet and Y. Watanabe, "FENDL-3 library - Summary document," IAEA Report INDC (NDS)-628, IAEA Vienna, 2012.
- [15] Y. Wu, FDS Team, "Benchmarking of CAD-based SuperMC with ITER benchmark model," *Fusion Eng. and Des.* 84, 2009, pp. 1987-1992.



Takeo Nishitani was born in Otawara city, Tochigi, Japan in 1954. He received the B.S. degree in nuclear engineering from Tohoku University, Sendai, Japan, in 1978, the M.S. degree in nuclear engineering from the University of Tokyo, Tokyo, Japan, in 1980, and the Ph.D. degree in nuclear engineering from the University of Tokyo.

He worked on the neutron diagnostics of the JT-60 tokamak in the Japan Atomic Energy Research Institute (JAERI), Naka, from 1980 to 2001. He was a Principal Scientist with Japan Atomic Energy Agency (JAEA) and worked on the fusion neutronics.

He is currently a Specially Appointed Professor with the Institute for Fusion Science since 2015. His current research interest is the neutron diagnostics development and the energetic particle behavior study in the LHD plasma.



Hideaki Matsuura was born in Dazaifu city, Fukuoka, Japan in 1965. He received the M.S. and Ph.D. degrees in nuclear engineering from Kyushu University, Fukuoka, Japan in 1978 and 1993, respectively.

He worked on applied quantum physics and nuclear engineering, Kyushu University

He is currently an Associate Professor with at Kyushu University since 2014. His current concern is collective nuclear reactions (nuclear burning) and related phenomena in neutronics/photronics field.



Neng Pu was born in Chengjiang, Yunnan province, China in 1985. He received the B.S. and M.S. degrees in Heilongjiang University, Haerbin, Heilongjiang, China in 2008, and Yunnan University, Kunming, Yunnan, China in 2012.

He worked at Institute of Plasma Physics, Chinese Academy of Sciences (ASIPP), Hefei, Anhui, China from 2012 to 2016. He is currently a Ph.D. student of SOKENDAI since October 2016.



Kunihiko Ogawa was born in Mino city, Gifu, Japan in 1984. He entered Ritsumeikan University, Shiga, Japan and majored in electrical and electronic engineering. He skipped the B.S. degree and entered Nagoya University in 2006. He completed his M.S. and Ph.D. degrees in department of energy science and engineering of Nagoya University, Nagoya,

Japan, in 2008 and 2011, respectively.

He worked on National Institute for Fusion Science from 2012. He is currently a Assistant Professor with the National Institute for Fusion Science since 2013. His current research interest is the energetic-ion confinement in the LHD plasma.



Hiroki Kawase was born in Nagoya city, Aichi, Japan in 1993. He received the B.S. degree in Physics from Ehime University, Matsuyama, Japan, in 2016.

He is currently a graduate student with SOKENDAI (The Graduate University for Advanced Studies) since 2016. His current research interest is the confinement study of energetic ions with neutron diagnostics in

the LHD plasmas.



Mitsutaka Isobe was born in Nagoya city, Aichi, Japan. He received the B.S. and the M.S. degrees in applied physics from Fukui University, Fukui, Japan, in 1991 and 1993, respectively, and Ph.D. degrees in fusion science from SOKENDAI (The Graduate University for Advanced Studies), Hayama, Japan, in 1996.

He has been working on heliotron devices, i.e. CHS and LHD. He is currently a Professor with the National Institute for Fusion Science since 2015. His current research interest is the confinement study of energetic ions by means of neutron diagnostics in the LHD plasma.