



INTERNATIONAL ATOMIC ENERGY AGENCY

17th IAEA Fusion Energy Conference
Yokohama, Japan, 19 - 24 October 1998

IAEA-CN-69/EXP1/18

NATIONAL INSTITUTE FOR FUSION SCIENCE

Particle Transport Study with Tracer-Encapsulated Solid Pellet Injection

S. Sudo, K. Kholopenkov, K. Matsuoka, S. Okamura,
C. Takahashi, R. Akiyama, A. Fujisawa, K. Ida, H. Idei, H. Iguchi,
M. Isobe, S. Kado, K. Kondo, S. Kubo, H. Kuramoto, T. Minami,
S. Morita, S. Nishimura, M. Osakabe, M. Sasao, B. Peterson,
K. Tanaka, K. Toi and Y. Yoshimura

(Received - Sep. 24, 1998)

NIFS-560

Oct. 1998

This report was prepared as a preprint of work performed as a collaboration research of the National Institute for Fusion Science (NIFS) of Japan. This document is intended for information only and for future publication in a journal after some rearrangements of its contents.

Inquiries about copyright and reproduction should be addressed to the Research Information Center, National Institute for Fusion Science, Oroshi-cho, Toki-shi, Gifu-ken 509-02 Japan.

RESEARCH REPORT NIFS Series

This is a preprint of a paper intended for presentation at a scientific meeting. Because of the provisional nature of its content, changes of substance or detail may have to be made before publication. The preprint is issued with the understanding that it will not be cited in the literature and that any reproduction is at the reader's own risk. The views expressed and the statements made remain the responsibility of the author(s). The views do not necessarily reflect those of the government of the designated member state(s) or of the organizations sponsoring this meeting cannot be held responsible for any errors or for the content of this preprint.

NAGOYA, JAPAN

PARTICLE TRANSPORT STUDY WITH TRACER-ENCAPSULATED SOLID PELLETT INJECTION

S. SUDO, *K. KHLOPENKOV, K. MATSUOKA, S. OKAMURA,
C. TAKAHASHI, R. AKIYAMA, A. FUJISAWA, K. IDA, H. IDEI, H. IGUCHI,
M. ISOBE, S. KADO, **K. KONDO, S. KUBO, H. KURAMOTO, T. MINAMI,
S. MORITA, *S. NISHIMURA, M. OSAKABE, M. SASAO, B. PETERSON,
K. TANAKA, K. TOI, Y. YOSHIMURA

National Institute for Fusion Science, Oroshi, Toki, 509-5292 Japan

*Graduate Univ. for Advanced Studies, Hayama, Kanagawa, 240-0193 Japan

** Graduate School of Energy Science, Kyoto Univ., Kyoto, 606-8501 Japan

Abstract

In order to promote particle transport studies, a tracer-encapsulated solid pellet (TESPEL) is proposed to observe the behavior of tracer particles deposited locally. TESPEL consists of polystyrene as an outer part and LiH as an inner core. For proving the essential concept of the new diagnostics, TESPEL is injected into a neutral-beam-heated plasma of the Compact Helical System. This experiment shows the successful local deposition of the tracer, and the behavior of tracer particles deposited locally in the plasma core region is also observed by a method of charge exchange recombination spectroscopy. Thus, our new diagnostic concept has been proven for the first time from the viewpoints of both the production method of a tracer-encapsulated pellet as well as from the observation of the tracer particles.

1. INTRODUCTION

Transport of a magnetically confined plasma is still one of the key subjects to be clarified because of its importance for fusion reactor development. In order to promote particle transport studies, the concept of a tracer-encapsulated cryogenic pellet (TECPEL) has been proposed [1]. The essential point of this method is based upon the production of a both poloidally and toroidally localized particle source as tracers, which are deposited at first in a very small volume in the plasma in contrast to the conventional methods [2, 3].

After injection of such a TECPEL into a plasma, the locally deposited "tracer" particles (originated from the core of the TECPEL) will be immediately ionized and heated by the bulk electrons and ions. These tracer particles move along field lines at first. Such motion in the direction parallel to the magnetic field lines may be detected with a charge exchange recombination spectroscopy (CXRS) array with high temporal and spatial resolution at the location of the neutral beam. The clear measurement of particle transport in the whole plasma will be possible, and new significant information about transport characteristics will be obtained. This feature makes the transport parallel to the magnetic field line clear in the initial phase, which is usually difficult. And, this can simultaneously make diagnostics about radial transport much clearer because of radially narrow localized tracer particles. Furthermore, with the proposed method, the amount of the deposited particles will be clearly identified because of the known size of the inner core of the TECPEL.

2. EXPERIMENTAL SETUP

Based on the concept described in chapter 1, the technology of a TECPEL injector has been substantially developed [4]. TECPEL, however, needs both a complicated cryogenic system and somewhat large vacuum chamber. So, it is not appropriate to apply TECPEL in a small or medium machine. For the proof of principle of the diagnostic, a tracer-encapsulated solid pellet (TESPEL) instead of TECPEL is used in the Compact Helical System (CHS).

While TECPEL consists of a hydrogen isotope as an outer part and low Z material as an inner core, TESPEL consists of polystyrene (polymer: $-\text{CH}(\text{C}_6\text{H}_5)\text{CH}_2-$) as an outer part and LiH as an inner core [5]. Therefore, TESPEL can be handled at room temperature, and therefore the device can be much simpler, so it is more appropriate to a medium size experimental device such as CHS. The diameter and thickness of the typical polystyrene shell are 300 μm and 50 μm , respectively. The tracer core is a LiH block with a typical diameter of 50 μm . The photo of a produced pellet is shown in Fig. 1. The hole for tracer insertion is seen in Fig.1 (a). By changing the focal point of the microscope, the cross section of the TESPEL around the equatorial plane is shown in Fig.1 (b). The LiH core inside of TESPEL is seen in the upper right side. The LiH block is not necessarily spherical.

The method for accelerating a pellet is pneumatic. A typical accelerating pressure of He gas is 25 atm, and the typical pellet velocity with this pressure is about 300 m/s. The rotating disk in the TESPEL injector has 30 holes for holding pellets. In one series of experiments, 29 pellets can be injected one by one by rotating the disk. Such rotating disk can be renewed in less than one hour because of a simple configuration.

The TESPEL injector has a differential pumping system as in case of usual pellet injectors. Such a full TESPEL injection system is installed at CHS. The schematic of the arrangement of the pellet injection line, the neutral beam injector (NBI) line, observation points of Li III in the radial direction, and the other diagnostics for observing pellet ablation are shown in Fig. 2. The Li III emissions are observed at the location on the NBI beam path and at the neighboring port without the NBI beam path. Thus, the difference of these signals can be interpreted as a pure emission from Li^{+2} ions produced through the process of charge exchange of Li^{+3} ions with neutral hydrogen atoms of NBI. Each location is equipped with 10 sets of lens and fibers. The spatial resolution for observing in the vertical chord is 8 - 16 mm. The fibers are connected to photomultipliers through filters for Li III (449.9 nm). In contrast to the conventional CXRS systems using CCD, here photomultipliers for higher time resolution (limited up to 10 μs due to sampling rate of data acquisition) are used.

3. EXPERIMENTAL RESULTS

3.1 Observation of local deposition of tracer particles

The target plasma of CHS is heated by NBI with a power of about 1 MW. This NBI is also utilized as a neutral beam source for the charge exchange recombination spectroscopy (CXRS) as shown in Fig. 2.

The light emission from the pellet is collected with an optical system, and then it is divided by a half mirror to two photomultipliers, each having a filter. Therefore, simultaneously H_α and Li II (or Li I) signals can be registered. Furthermore, two CCD cameras are also installed for observing the images of H_α and Li II (or Li I) emission.

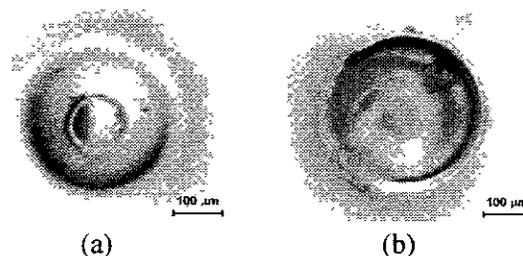


Fig. 1 (a) Photo of TESPEL. Insertion hole is seen in the center. (b) LiH core inside of TESPEL is seen in the upper right side [5].

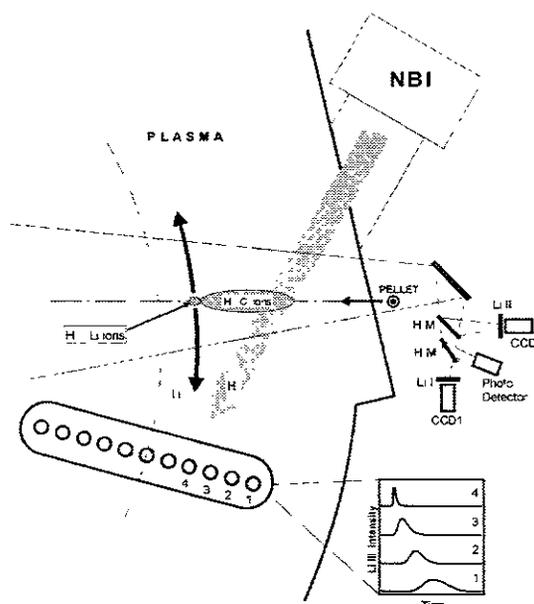


Fig. 2 Schematic of the experimental arrangement.

From the CCD images, it is found that the pellet reaches the central region of the plasma. An intense emission region of Li II is localized in the central region of the plasma. The thickness of the pellet trace seen as H_α light is less than 10 mm.

Photomultiplier signals of H_α and Li II show that at first H_α appears for about 600 μs and then Li II emits for a short period of around 100 μs in the late phase as shown in Fig. 3 (a). For comparison, signals from H_α and Li II detectors are shown in Fig.3 (b) in case without tracer. In this case, as expected, the peak in the late phase for Li II does not appear. Those results clearly indicate the local deposition of the tracer particles in the core region, although a sharper localization would be preferable.

3.2 Observation of behavior of tracer particles

By TESPEL pellet injection into the plasma with the density of the level of $1.5 \times 10^{19} \text{ m}^{-3}$, the electron density increase of $\sim 5 \times 10^{18} \text{ m}^{-3}$ is observed, which is consistent with the particle number contained in the polystyrene shell (the contribution from the core is negligible). Under the conditions of such a density increase, the electron temperature is kept higher than the radiation barrier, and the temperature is recovered to the original level in a late phase.

Typical emissions of 449.9 nm (Li III) for CXRS of Li ions near the tracer-deposited radial position ($r/a=0.23$) at the location of the NBI path (for CXRS) denoted by "p13" and at the reference position with the equivalent optical configuration injection denoted by "p16" are shown in Fig. 4 in the case of $R_{ax} = 94.9 \text{ cm}$ and $B = 1.5 \text{ T}$. Both data are just the same during the RF heating, and some small difference is seen during NBI before pellet injection. After the TESPEL pellet injection, there is a clear difference of Li III intensity. Furthermore, it should be noticed that a clear drop of the CXRS signal "p13" appears at the timing of NBI turn-off. Thus, it can be firmly confirmed that the difference is due to the Li III CXR emission.

As one example of application to the particle transport study, Li III CXRS signals subtracted by reference signals (which do not see charge exchange with NBI) at the five different radial positions in the case of $R_{ax} = 99.5 \text{ cm}$ are shown in Fig. 5. Each chord has a diameter of 8 mm for observing area.

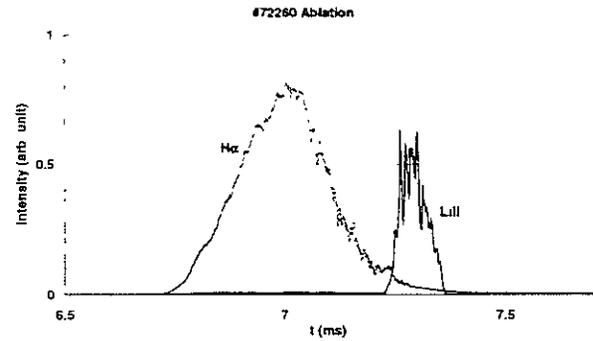


Fig. 3 (a) H_α and Li II emission during pellet ablation in case with tracer of TESPEL.

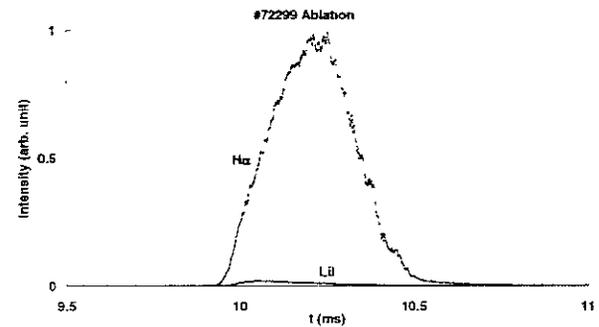


Fig. 3 (b) H_α and Li II emission during pellet ablation in case without tracer of TESPEL.

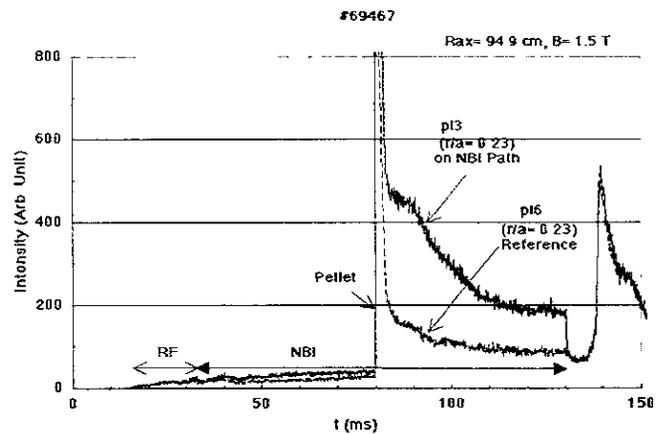


Fig. 4 One example of Li III emissions near the tracer-deposited radial position ($r/a=0.23$) at the location of NBI path (for CXRS) and at the reference position for TESPEL injection.

At first the peak appears near the center denoted by C in Fig. 5. As indicated by two arrows, the peak appears later in the outer radius, which is qualitatively reasonable. The delay of the peak between C and D is about 5 ms in the distance of 3.6 cm. In the inner radius, the delay is 10 ms in 7.2 cm, while 7 ms in 7.2 cm in the outer radius. In the late phase ($t \sim 110$ ms), the accumulation of Li ions in the core region is also observed.

Based on the equation (n means the density of the fully stripped Li ions) without source term:

$$\frac{\partial n}{\partial t} = \frac{1}{r} \frac{\partial}{\partial r} \left(r D \frac{\partial n}{\partial r} + V n \right)$$

the simplified analysis shows that the diffusion coefficient D is $0.13 \sim 0.19 \text{ m}^2/\text{s}$ at $r/a = -0.2 \sim 0.3$ (inward pinch V is neglected here, and there is no significant source in the outer radius at the initial phase).

Although a detailed comparison between the experimental data and transport simulation is necessary, this experimental result shows that the local transport analysis is possible.

4. CONCLUSION

In conclusion, a new diagnostic method for particle transport study with TESPEL has been experimentally implemented for the first time. The results from CHS have shown the successful local deposition of the tracer, and the behavior of tracer particles deposited locally in the plasma core region is also observed by a method of charge exchange recombination spectroscopy. Therefore, our new diagnostic concept has been proven for the first time from the viewpoints of both the production method of TESPEL and the observation of the tracer particle behavior.

Acknowledgments

The authors (S. S and K. K) would like to thank Drs. M. Takagi and T. Norimatsu of Osaka Univ. for helping them for preparation and treatment of plastic shell pellets. They are very grateful to Drs. I. Viniar and V. G. Kapralov of St. Petersburg State Technical Univ. for helping preparation and implementation of pellet injection experiments. They also would like to express their gratitude to Profs. K. Kondo and T. Obiki of Kyoto Univ. for supporting them on set-up of the pellet injector. They would also like to thank Director-General A. Iiyoshi and Prof. M. Fujiwara of NIFS for continuing support to this activity.

References

- [1] Sudo, S., *Journal of Plasma and Fusion Research*, **69** (1993) 1349.
- [2] Kaneko, H., Kondo, K., Motojima, O., *et al.*, *Nuclear Fusion* **27** (1987) 1075.
- [3] Khlopenkov, K. V., Sergeev, V. Yu., Sudo, S., *et al.*, *Fusion Engineering and Design* **34-35** (1997) 337.
- [4] Sudo, S., Itoh, H., and Khlopenkov, K., *Rev. Sci. Instrum.* **68** (1997) 2717.
- [5] Khlopenkov, K., and Sudo, S., *Rev. Sci. Instrum.* **69** (1998) 319.

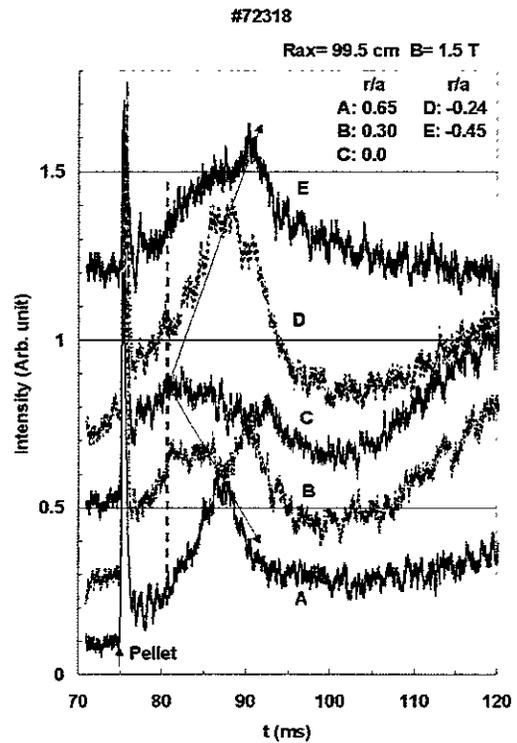


Fig. 5 Li III CXRS signals subtracted by reference signals at different radial positions.

Recent Issues of NIFS Series

- NIFS-524 T. Ohkawa,
Tunneling Electron Trap; Dec 1997
- NIFS-525 K Itoh, S-I Itoh, M Yagi, A Fukuyama,
Solitary Radial Electric Field Structure in Tokamak Plasmas, Dec 1997
- NIFS-526 Andrey N Lyakhov,
Alfven Instabilities in FRC Plasma; Dec 1997
- NIFS-527 J. Uramoto,
Net Current Increment of negative Muonlike Particle Produced by the Electron and Positive Ion Bunch-method; Dec. 1997
- NIFS-528 Andrey N. Lyakhov,
Comments on Electrostatic Drift Instabilities in Field Reversed Configuration, Dec. 1997
- NIFS-529 J. Uramoto,
Pair Creation of Negative and Positive Pionlike (Muonlike) Particle by Interaction between an Electron Bunch and a Positive Ion Bunch; Dec 1997
- NIFS-530 J Uramoto,
Measuring Method of Decay Time of Negative Muonlike Particle by Beam Collector Applied RF Bias Voltage, Dec. 1997
- NIFS-531 J Uramoto,
Confirmation Method for Metal Plate Penetration of Low Energy Negative Pionlike or Muonlike Particle Beam under Positive Ions; Dec. 1997
- NIFS-532 J Uramoto,
Pair Creations of Negative and Positive Pionlike (Muonlike) Particle or K Mesonlike (Muonlike) Particle in H₂ or D₂ Gas Discharge in Magnetic Field; Dec 1997
- NIFS-533 S. Kawata, C. Boonmee, T Teramoto, L Drska, J Limpouch, R. Liska, M Sinor,
Computer-Assisted Particle-in-Cell Code Development; Dec. 1997
- NIFS-534 Y. Matsukawa, T. Suda, S. Ohnuki and C. Namba,
Microstructure and Mechanical Property of Neutron Irradiated TiNi Shape Memory Alloy; Jan 1998
- NIFS-535 A. Fujisawa, H Iguchi, H Idei, S. Kubo, K. Matsuoka, S. Okamura, K Tanaka, T. Minami, S. Ohdachi, S. Morita, H. Zushi, S. Lee, M. Osakabe, R. Akiyama, Y. Yoshimura, K. Toi, H. Sanuki, K. Itoh, A. Shimizu, S. Takagi, A. Ejiri, C. Takahashi, M. Kojima, S. Hidekuma, K. Ida, S. Nishimura, N. Inoue, R. Sakamoto, S.-i. Itoh, Y. Hamada, M. Fujiwara,
Discovery of Electric Pulsation in a Toroidal Helical Plasma; Jan. 1998
- NIFS-536 Lj.R. Hadzievski, M.M Skonc, M. Kono and T. Sato,
Simulation of Weak and Strong Langmuir Collapse Regimes, Jan 1998
- NIFS-537 H Sugama, W. Horton,
Nonlinear Electromagnetic Gyrokinetic Equation for Plasmas with Large Mean Flows; Feb 1998
- NIFS-538 H Iguchi, T.P. Crowley, A. Fujisawa, S. Lee, K. Tanaka, T. Minami, S. Nishimura, K. Ida, R. Akiyama, Y. Hamada, H., Idei, M. Isobe, M. Kojima, S. Kubo, S. Morita, S. Ohdachi, S. Okamura, M. Osakabe, K. Matsuoka, C. Takahashi and K. Toi,
Space Potential Fluctuations during MHD Activities in the Compact Helical System (CHS); Feb. 1998
- NIFS-539 Takashi Yabe and Yan Zhang,
Effect of Ambient Gas on Three-Dimensional Breakup in Coronet Formation Process, Feb. 1998
- NIFS-540 H Nakamura, K. Ikeda and S. Yamaguchi,
Transport Coefficients of InSb in a Strong Magnetic Field; Feb. 1998
- NIFS-541 J Uramoto,
Development of v_{μ} Beam Detector and Large Area v_{μ} Beam Source by H₂ Gas Discharge (I), Mar. 1998

- NIFS-542 J. Uramoto,
Development of $\bar{\nu}_\mu$ Beam Detector and Large Area $\bar{\nu}_\mu$ Beam Source by H_2 Gas Discharge (II),
Mar. 1998
- NIFS-543 J. Uramoto,
Some Problems inside a Mass Analyzer for Pions Extracted from a H_2 Gas Discharge; Mar. 1998
- NIFS-544 J. Uramoto,
Simplified ν_μ $\bar{\nu}_\mu$ Beam Detector and ν_μ $\bar{\nu}_\mu$ Beam Source by Interaction between an Electron Bunch and a Positive Ion Bunch; Mar. 1998
- NIFS-545 J. Uramoto,
Various Neutrino Beams Generated by D_2 Gas Discharge; Mar.1998
- NIFS-546 R. Kanno, N. Nakajima, T. Hayashi and M. Okamoto,
Computational Study of Three Dimensional Equilibria with the Bootstrap Current; Mar. 1998
- NIFS-547 R. Kanno, N. Nakajima and M. Okamoto,
Electron Heat Transport in a Self-Similar Structure of Magnetic Islands; Apr. 1998
- NIFS-548 J.E. Rice,
Simulated Impurity Transport in LHD from MIST; May 1998
- NIFS-549 M.M. Skoric, T. Sato, A.M. Maluckov and M.S. Jovanovic,
On Kinetic Complexity in a Three-Wave Interaction; June 1998
- NIFS-550 S. Goto and S. Kida,
Passive Saclar Spectrum in Isotropic Turbulence: Prediction by the Lagrangian Direct-interaction Approximation; June 1998
- NIFS-551 T. Kuroda, H. Sugama, R. Kanno, M. Okamoto and W. Horton,
Initial Value Problem of the Toroidal Ion Temperature Gradient Mode ; June 1998
- NIFS-552 T. Mutoh, R. Kumazawa, T. Seki, F. Simpo, G. Nomura, T. Ido and T. Watari,
Steady State Tests of High Voltage Ceramic Feedthroughs and Co-Axial Transmission Line of ICRF Heating System for the Large Helical Device ; June 1998
- NIFS-553 N. Noda, K. Tsuzuki, A. Sagara, N. Inoue, T. Muroga,
ronaization in Future Devices -Protecting Layer against Tritium and Energetic Neutrals-; July 1998
- NIFS-554 S. Murakami and H. Saleem,
Electromagnetic Effects on Rippling Instability and Tokamak Edge Fluctuations; July 1998
- NIFS-555 H. Nakamura , K. Ikeda and S. Yamaguchi,
Physical Model of Nernst Element; Aug. 1998
- NIFS-556 H. Okumura, S. Yamaguchi, H. Nakamura, K. Ikeda and K. Sawada,
Numerical Computation of Thermoelectric and Thermomagnetic Effects; Aug. 1998
- NIFS-557 T. Yasuhiko, O. Masaki, T. Katsuyoshi, O. Yoshihide, K. Osamu, A. Eiji, K. Toshikazu, A. Ryuichi and T. Masanobu,
Development of a High-Current Hydrogen-Negative Ion Source for LHD-NBI System; Aug.1998
- NIFS-558 M. Tanaka, A. Yu Grosberg and T. Tanaka,
Molecular Dynamics of Structure Organization of Polyampholytes;Sep. 1998
- NIFS-559 R. Honuchi, K. Nishimura and T. Watanabe,
Kinetic Stabilization of Tilt Disruption in Field-Reversed Configurations; Sep. 1998
(IAEA-CN-69/THP1/11)
- NIFS-560 S. Sudo, K. Kholopenkov, K. Matsuoka, S. Okamura, C. Takahashi, R. Akiyama, A. Fujisawa, K. Ida, H. Idei, H. Iguchi, M. Isobe, S. Kado, K. Kondo, S. Kubo, H. Kuramoto, T. Minami, S. Morita, S. Nishimura, M. Osakabe, M. Sasao, B. Peterson, K. Tanaka, K. Toi and Y. Yoshimura,
Particle Transport Study with Tracer-Encapsulated Solid Pellet Injection;Oct. 1998
(IAEA-CN-69/EXP1/18)