

NATIONAL INSTITUTE FOR FUSION SCIENCE

Design and Fabrication of Forced-Flow Coils as an R&D Program for Large Helical Device

K. Takahata, N. Yanagi, T. Mito, J. Yamamoto, O. Motojima,
LHD Design Group, K. Nakamoto, S. Mizukami, K. Kitamura,
Y. Wachi, H. Shinohara, K. Yamamoto, M. Shibui, T. Uchida
and K. Nakayama

(Received - Feb. 22, 1991)

NIFS-81

Mar. 1991

RESEARCH REPORT
NIFS Series

This report was prepared as a preprint of work performed as a collaboration research of the National Institute for Fusion Science (NIFS) of Japan. This document is intended for information only and for future publication in a journal after some rearrangements of its contents.

Inquiries about copyright and reproduction should be addressed to the Research Information Center, National Institute for Fusion Science, Nagoya 464-01, Japan.

NAGOYA, JAPAN

DESIGN AND FABRICATION OF FORCED-FLOW COILS
AS AN R&D PROGRAM FOR LARGE HELICAL DEVICE

K. Takahata, N. Yanagi, T. Mito, J. Yamamoto, O. Motojima and LHD Design Group
National Institute for Fusion Science, Chikusa-ku, Nagoya 464-01, Japan
K. Nakamoto, S. Mizukami, K. Kitamura, Y. Wachi, H. Shinohara,
K. Yamamoto, M. Shibui, T. Uchida and K. Nakayama
Toshiba Corporation, Suehiro-cho, Tsurumi-ku, Yokohama 230, Japan

1. Abstract

As research and development of helical field coil and poloidal field coil for Large Helical Device (LHD), two forced-flow cooled NbTi superconducting coils (TOKI-TF, PF) have been designed and fabricated. The helical coil (TOKI-TF) is a 1/4 scale model of LHD. It has the major radius of 0.9 m, the minor radius of 0.25 m and pitch number of 4. Nominal current and maximum field were designed to be 8 kA and 2.8 T, respectively. Another coil (TOKI-PF) was fabricated for the demonstration of LHD poloidal field coils. It consists of two double-pancakes with the inner radius of 0.6 m and the outer radius of 0.82 m. Nominal current of 25 kA simulates that of LHD poloidal field coils. Cable-in-conduit type conductors were used for the both coils. The test facility was also constructed with a vacuum vessel, liquid nitrogen shield, 30 kA power leads, a heat exchanger, cryogenic supports and others. In this paper, design concepts and details will be presented.

Keywords: superconducting coil, helical coil, poloidal coil,
forced-flow coil, cable-in-conduit conductor,
Large Helical Device

2. Introduction

The Large Helical Device (LHD) is a heliotron/torsatron type fusion experimental device and the seven-year project to construct the LHD started in FY1990 [1-2]. Before starting the machine construction, various R&D programs such as superconducting conductors and magnets, a vacuum vessel, heating and diagnostic facilities have been carried out since FY1988.

Superconducting magnet systems are needed for developing a steady state fusion reactor. The R&D of superconducting magnets which consist of helical and poloidal field coils is one of the major objectives for this project. Manufacturing of two forced-flow cooled coils which are named TOKI-TF and -PF has been completed as a part of R&D programs in FY1989 and they are scheduled to be tested in superconducting magnet test facilities which are now under construction in TOKI-city near Nagoya. The TOKI-TF and -PF coils simulate the helical and poloidal coils, respectively. The main objectives of these R&D coils are to investigate fabricability, stability, mechanical stiffness, electro-magnetic and hydraulic characteristics, and quench protection of the LHD coil system using forced-flow cooled superconductors. It is noted that the TOKI-TF is the first helical coil in forced-flow cooled coils.

In the current design of LHD, pool-cooling has been adopted as a cooling method of the helical coils. The R&D of forced-flow cooled helical coil must, however, be kept on in the long term. From this point of view, not only a pool-cooled helical coil, TOKI-HB[3], but also the forced-flow cooled helical coil, TOKI-TF, was decided to be fabricated. One of severe requirements for the helical coil is high accuracy for magnetic field. For example, the required accuracy is about 1×10^{-4} in regarded to global field. Not only careful coil winding but also extreme accuracy for machining and assembling are, therefore, necessary. The mechanical stiffness of the coil is also needed to reduce deformation by electro magnetic force.

Forced-flow cooling method is proposed for the poloidal coils. The poloidal coils must make field changing of 0.02 T/sec in the plasma in order to control it. The field changing up to 0.5 T/sec is required to the poloidal coils. The TOKI-PF coil is, therefore, planned to be tested in a pulse operation.

In this paper, design concepts and details of these two coils will be reported. The overview of a test facility for the forced-flow coils will also be presented.

3. Conductors

Cable-in-conduit type NbTi conductors were used in the both coils. Cross-

sectional views and characteristics are shown in Fig. 1. and Table 1, respectively. Conduit thickness of the both conductors was designed to be 1.0 mm considering pressure rise up to 3 MPa due to quench and electro-magnetic force. The exterior surface of conductor was completely insulated by a layer of half-lapped Glass-Kapton-Glass tapes, which allows a dump voltage of 1 kV. The insulation thicknesses of TOKI-TF and -PF are 1 and 2.5 mm, respectively. The void fraction was designed to be 40 % for the both conductors. In regard to the TOKI-PF, CuNi was added into strands and the strands are insulated with formvar of 10 μ m in thickness in order to reduce coupling losses between filaments or strands. The coupling time constant was estimated to be 2.2 msec.

4. TOKI-TF Coil

Coil Design : Top and cross-sectional views of the TOKI-TF coil are shown in Fig. 2. The TOKI-TF is a helical coil with the toroidal pitch number of 4. The specifications are listed in Table 2. The major radius of 0.9 m corresponds to a 1/4 scale model of the LHD. The winding crosssection is 129x129 mm² . The nominal current of 8 kA and the maximum field of 2.77 T are about 1/3 of those of LHD ($I_{op}=20 \sim 25$ kA, $B_{max}=7.2$ T). In spite of these scale downs, the average current density in the winding is set to be 47.6 A/mm² for nominal operation, which is as high as that of LHD.

The TOKI-TF has ten cooling paths into which supercritical helium (SHE) flows. Each layer corresponds to each path with the average length of 8.5 m. The design mass flow rate is 1 g/sec for each path with the pressure of 1MPa. The support structures (a coil case and torus beams) are also cooled by SHE with the total flow rate of 10 g/sec.

Support Structures: The conductors were wound in a coil case in order to fix the coil shape and to support the coil against the electro-magnetic force. Calculated distributions of the electro-magnetic force are shown in Fig. 3. For the helical coil, the force is applied in not only the radial direction but also the circumferential and axial directions. The torus beams joining the coil case contribute toward supporting the over-turning force. The core ring in Fig. 2 was temporarily used for supporting the coil during machining the case and winding the conductors, and took off after manufacturing. These configurations are similar to the LHD support system regardless of cooling method.

As designing the support structures, deformation of the coil is important in view of field accuracy. The structural analysis indicated that the maximum deformation is less than 0.3 mm. This value is within acceptable accuracy. During manufacturing of the coil case, the finishing dimentions with the

specified accuracy of 5×10^{-4} are required. The case was made with numerically controlled machining process after assembling and welding the parts (the bottom and side slabs). The top parts of of the case were, finally, not assembled by welding but with bolts. The irregular deformation due to the weld could be reduced by the above process.

Coil Winding and Conductor Joints : Unlike a conventional ring coil, the bending and twisting angles of the conductor depend on the spatial position. For TOKI-TF, the roller bending method with twisting capability was employed in the winding machine. The forming head could be moved in the toroidal direction and the bent and twisted conductor was paid out from the head into the coil case. The spatial and angular parameters were controlled by a computer system.

The conductors were electrically connected in series between layers after completing the winding process. Thus the TOKI-TF has nine joints. In order to reduce the local error field due to the joints, they were distributed into four locations as shown in Fig. 2. In the joints, superconducting strands were connected using ultra-sonic welding method. Conductivity of the connected part was improved by 5 times compared with conventional soldering.

5. TOKI-PF Coil

TOP and cross-sectional views of TOKI-PF coil are shown in Fig. 4 and the major specifications are listed in Table 2. It consists of two double-pancakes and has the inner radius of 0.6 m and the outer radius of 0.82 m. The nominal current of 25 kA simulates that of the LHD poloidal field coils (20 ~ 35 kA). The maximum field was calculated to be 2.76 T in a single operation. In the next step, a bias field magnet is planned to be mounted with the coil because the maximum field of LHD poloidal coils are 5 ~ 7 T. The conductor was, therefore, designed assuming that it is used in the field of 7 T.

The winding were not encased in the coil case unlike the TOKI-TF, and the electro-magnetic force is supported by the conductor itself. In this case, the calculated maximum stress in the S.S.316L conduit was approximately 300 MPa, and this value also simulates that of the LHD poloidal field coil.

Number of cooling paths is 4. The SHE will flow from the inner turns to the outer turns because the maximum field is generated at the inner turns. The design mass flow rate is 4 g/sec for each path with the pressure of 1 MPa.

6. Test Facility

Each coil will be set in the cryostat which is composed of a vacuum vessel,

liquid nitrogen shield, 30 kA power leads, a SHE heat exchanger, cryogenic supports and others. Figure 5 shows configurations of the test facility in which TOKI-TF coil is set. The vacuum vessel has a diameter of 2.8 m, height of 6.0 m and weight of 15 ton. When exchanging the coil, the vessel can be divided into two parts.

The power leads, the SHE heat exchanger, various valves and pipes are set in the upper part of the vessel. The vapor-cooled power leads have liquid helium tanks. The heat leak from the transfer line up to 50 W can be compensated by the heat exchanger. The sub-cooling is also possible using the heat exchanger.

Each coil is laid on four cryogenic support posts made of GFRP and S.S.316 in the lower part of the vessel. The support has 20 K and 80 K heat intercepts, and a slide mechanism in the 300 K regime. The support can slide in the only major radius direction using guides. Considering the error field, the coil must be uniformly deformed during cool-down, warm-up and excitation. Such a slide is expected to have an effect on the uniform deformation.

7. Conclusions

The two forced-flow cooled coils and their test facility have been designed and fabricated as a part of R&Ds for LHD construction, and the confidence in construction of the LHD using forced-flow cooled conductors was obtained. The TOKI-TF helical coil was designed to have high mechanical stiffness and high field accuracy. The TOKI-PF pancake coil can simulate the poloidal field coil of the LHD in regard to reliability of 25 kA cable-in-conduit type conductor and stress of the conduit during quench and excitation. In the test facility, both coils can be tested under similar conditions to superconducting coil system of LHD. Finally, the coils are expected to be tested within FY1991, and the experience in manufacturing and test results will be utilized for constructing the LHD.

8. References


- [1] S.Morimoto, O.Motojima, J.Yamamoto, N.Ohyabu, K.Yamazaki, et al., "Design Study of the Superconducting Large Helical Device", Proc. 16th Symp. on Fusion Technology (SOFT 16), London 1990, to be published.
- [2] O.Motojima and LHD Design Group, "Design Status of Superconducting Large Helical Device", IEEE Trans. on Magn., MAG-27, 1991, to be published.
- [3] N.Yanagi, K.Takahata, T.Mito, J.Yamamoto, O.Motojima and LHD Design Group, "Design and Fabrication of Pool Cooled Helical Coil as an R&D Program for Large Helical Device", IEEE Trans. on Magn., MAG-27, 1991, to be published.

Table. 1 Specifications of conductors


Parameter	Unit	TOKI-TF	TOKI-PF
Type of conductor		Cable-in-conduit Forced-Flow	
Material		NbTi	
Critical current	kA	16 at 4 T	50 at 7 T
Conduit dimension	mm	11x11	17x22.5
thickness	mm	1.0	1.0
Void fraction		0.4	0.4
Strand diameter	mm	0.428	0.67
Number of strands		324	480
NbTi:Cu:CuNi ratio		1:4.8	1:1.6:0.5
Stability margin	mJ/cm ³	699	449

Table. 2 Specifications of TOKI-TF and TOKI-PF

Parameter	Unit	TOKI-TF	TOKI-PF
Configuration		helical	double-pancake
Major radius	mm	900	-
Minor radius	mm	250	-
Inner radius	mm	-	600
Outer radius	mm	-	820
Field period: m		4	-
Multipolarity: ℓ		1	-
Operating current	kA	8.08	25.6
Average current density	A /mm ²	47.6	43.6
Maximum field	T	2.77	2.76
Inductance	mH	41.1	3.18
Stored energy	MJ	1.34	1.04

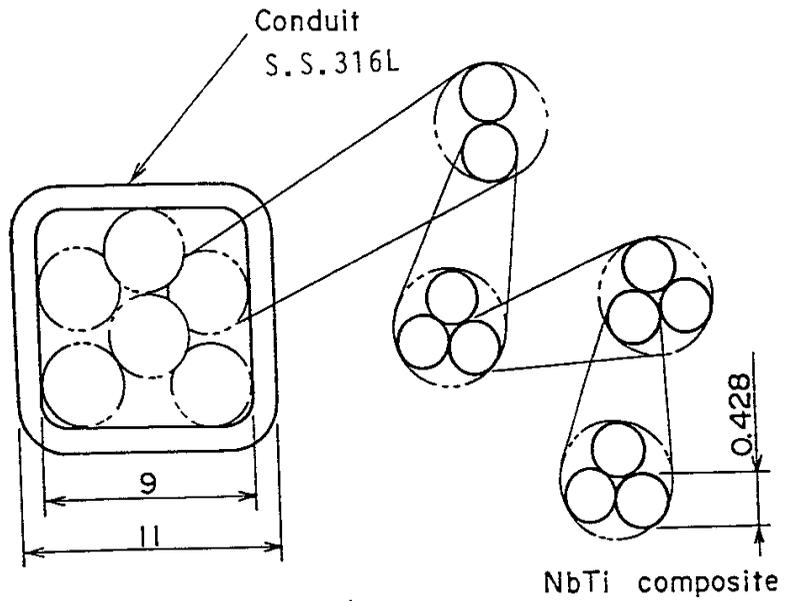

(a) TOKI-TF

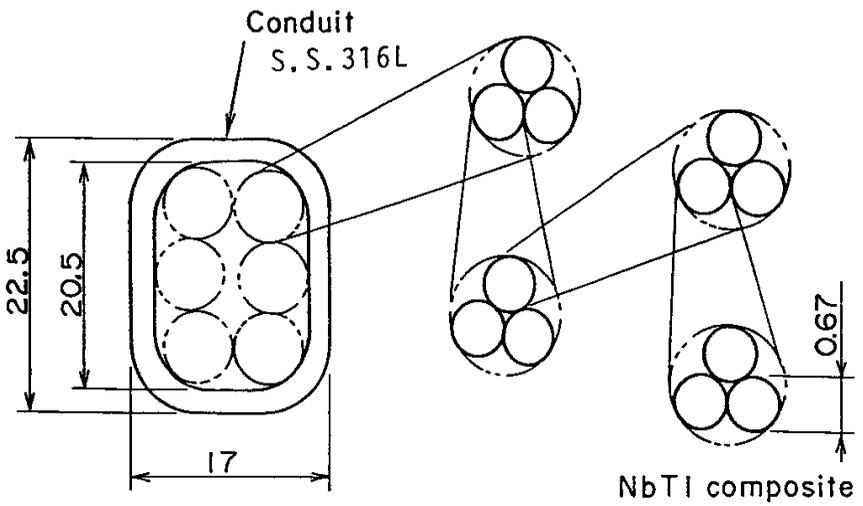

(b) TOKI-PF

Figure 1. Cable layouts of conductors

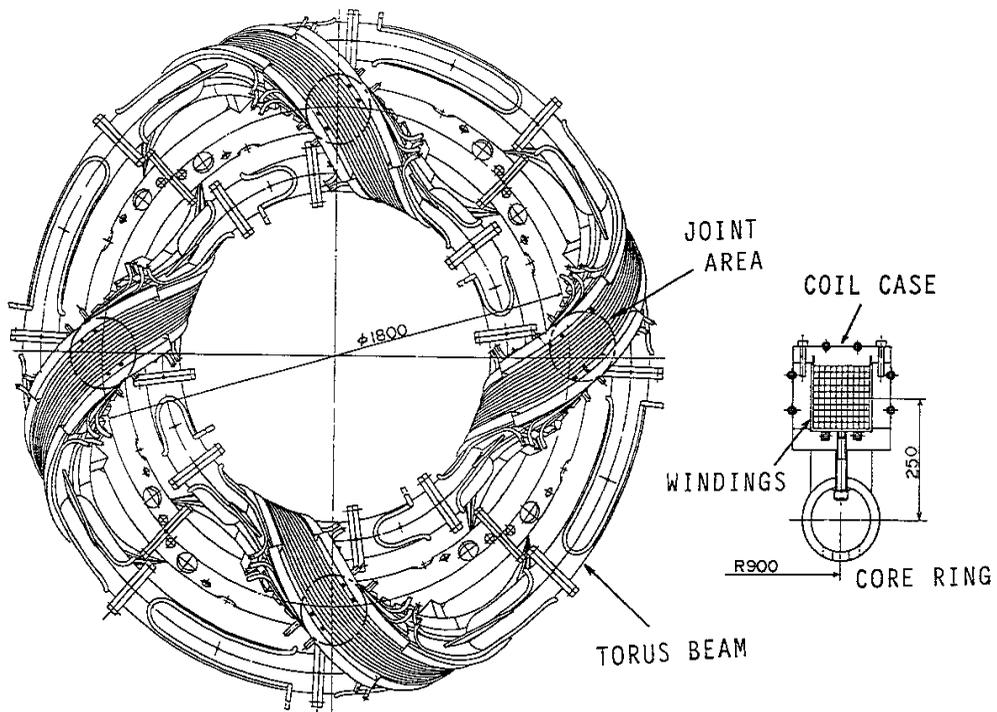


Figure 2. Top and cross-sectional views of TOKI-TF

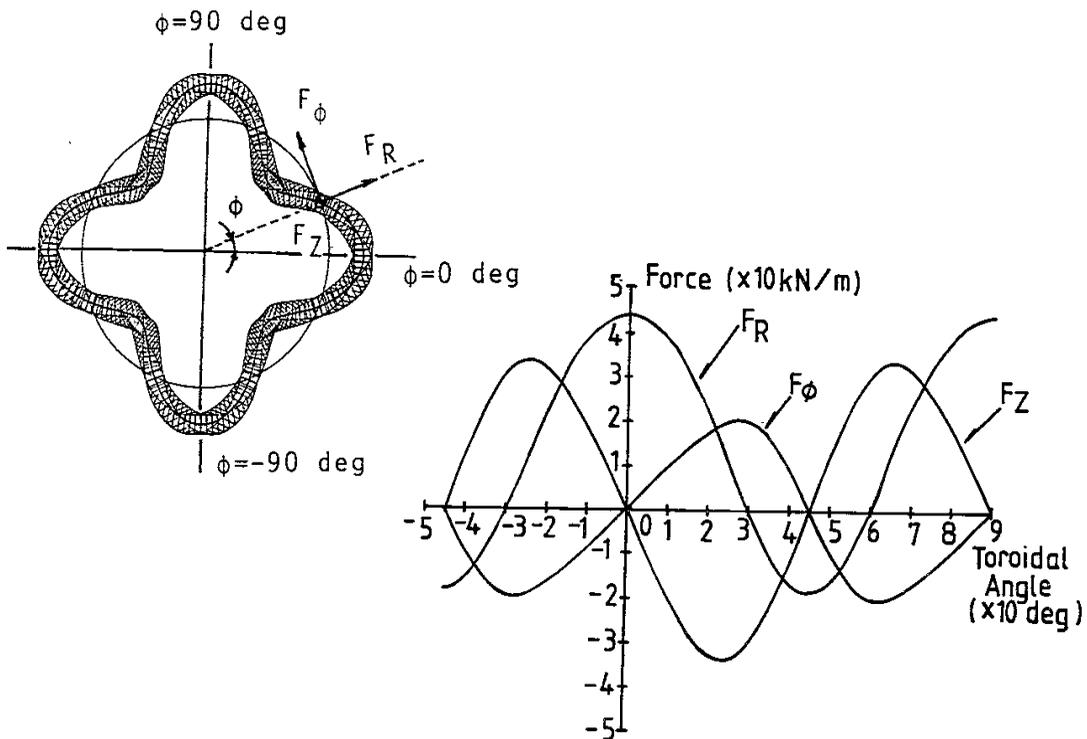


Figure 3. Electro-magnetic force in TOKI-TF winding

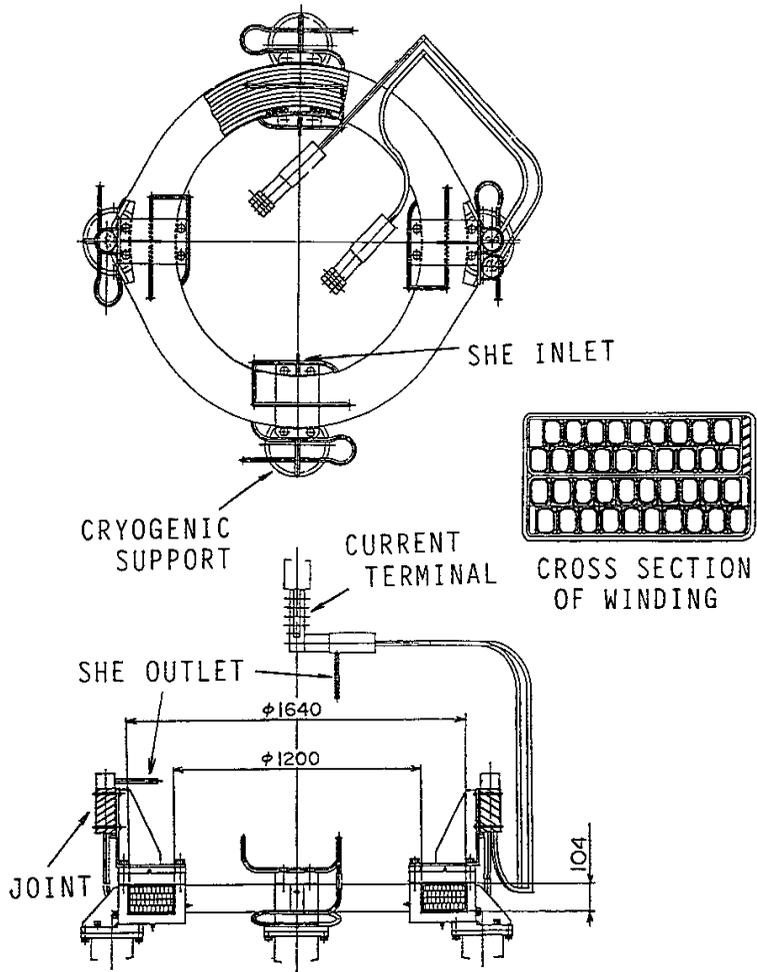


Figure 4. Top and cross-sectional views of TOKI-PF

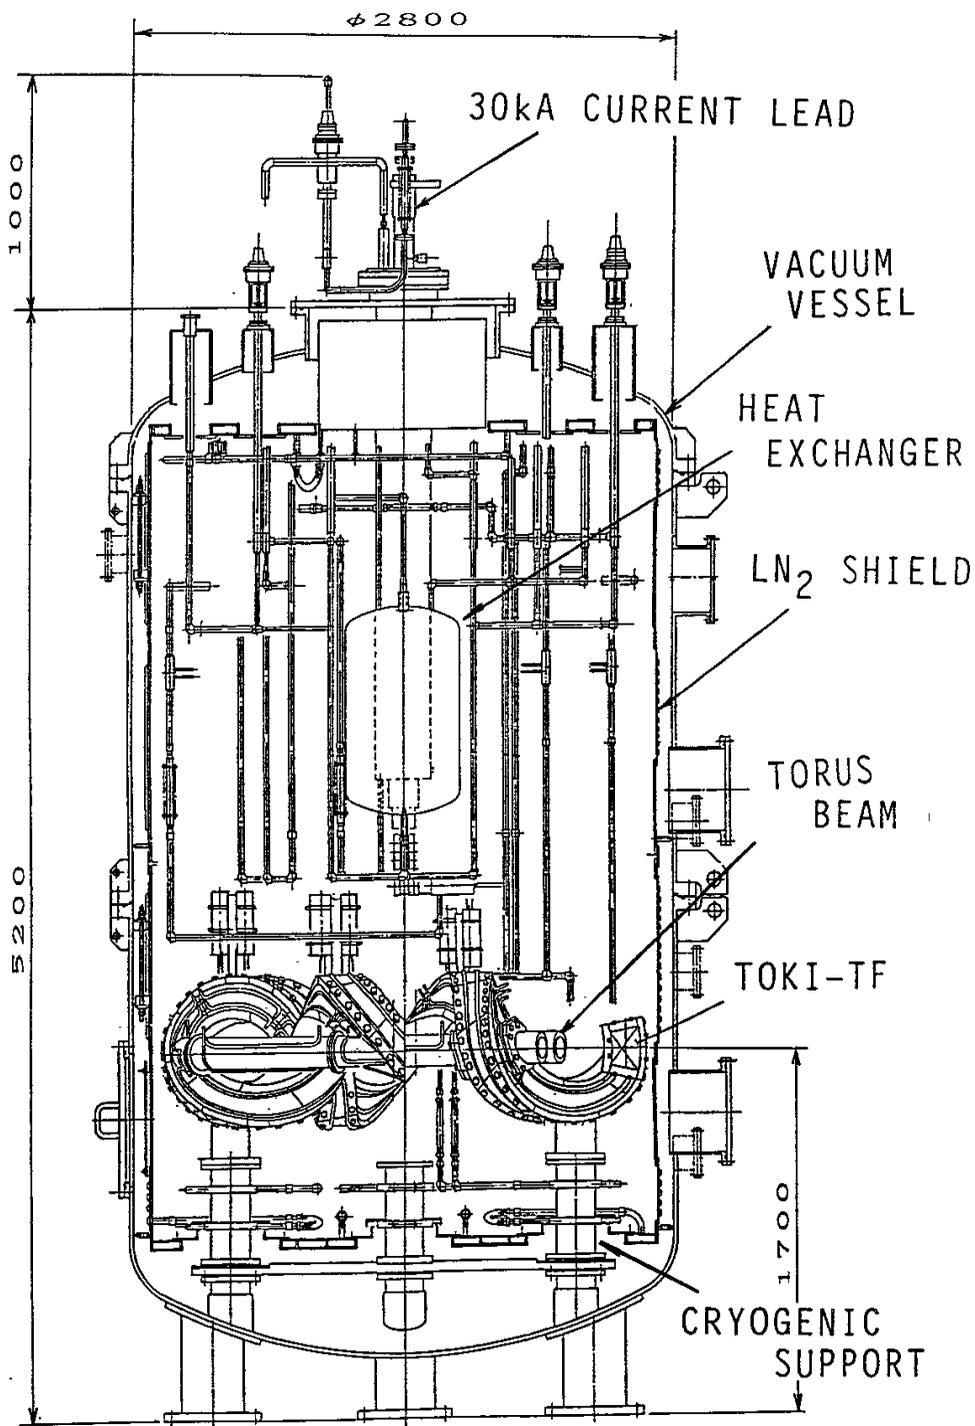


Figure 5. Configurations of the test facilities

Recent Issues of NIFS Series

- NIFS-29 S.-I. Itoh A. Fukuyama and K. Itoh, *Fokker-Plank Equation in the Presence of Anomalous Diffusion* ; May. 1990
- NIFS-30 K. Yamazaki, O. Motojima, M. Asao, M. Fujiwara and A. Iiyoshi, *Design Scalings and Optimizations for Super-Conducting Large Helical Devices* ; May 1990
- NIFS-31 H. Sanuki, T. Kamimura, K. Hanatani, K. Itoh and J. Todoroki, *Effects of Electric Field on Particle Drift Orbits in a $l=2$ Toratron* ; May 1990
- NIFS-32 Yoshi H. Ichikawa, *Experiments and Applications of Soliton Physics*; June 1990
- NIFS-33 S.-I. Itoh, *Anomalous Viscosity due to Drift Wave Turbulence* ; June 1990
- NIFS-34 K. Hamamatsu, A. Fukuyama, S.-I. Itoh, K. Itoh and M. Azumi, *RF Helicity Injection and Current Drive* ; July 1990
- NIFS-35 M. Sasao, H. Yamaoka, M. Wada and J. Fujita, *Direct Extraction of a Na- Beam from a Sodium Plasma* ; July 1990
- NIFS-36 N. Ueda, S.-I. Itoh, M. Tanaka and K. Itoh, *A Design Method of Divertor in Tokamak Reactors* Aug. 1990
- NIFS-37 J. Todoroki, *Theory of Longitudinal Adiabatic Invariant in the Helical Torus*; Aug. 1990
- NIFS-38 S.-I. Itoh and K. Itoh, *Modelling of Improved Confinements – Peaked Profile Modes and H-Mode–* ; Sep. 1990
- NIFS-39 O. Kaneko, S. Kubo, K. Nishimura, T. Syoji, M. Hosokawa, K. Ida, H. Idei, H. Iguchi, K. Matsuoka, S. Morita, N. Noda, S. Okamura, T. Ozaki, A. Sagara, H. Sanuki, C. Takahashi, Y. Takeiri, Y. Takita, K. Tsuzuki, H. Yamada, T. Amano, A. Ando, M. Fujiwara, K. Hanatani, A. Karita, T. Kohmoto, A. Komori, K. Masai, T. Morisaki, O. Motojima, N. Nakajima, Y. Oka, M. Okamoto, S. Sobhanian and J. Todoroki, *Confinement Characteristics of High Power Heated Plasma in CHS*; Sep. 1990
- NIFS-40 K. Toi, Y. Hamada, K. Kawahata, T. Watari, A. Ando, K. Ida, S. Morita, R. Kumazawa, Y. Oka, K. Masai, M. Sakamoto, K. Adati, R. Akiyama, S. Hidekuma, S. Hirokura, O. Kaneko, A. Karita, T. Kawamoto, Y. Kawasumi, M. Kojima, T. Kuroda, K. Narihara, Y. Ogawa, K. Ohkubo, S. Okajima, T. Ozaki, M. Sasao, K. Sato, K.N. Sato, T. Seki, F. Shimpo, H. Takahashi, S. Tanahashi, Y. Taniguchi and T. Tsuzuki, *Study of Limiter H- and IOC- Modes by Control of Edge Magnetic Shear and Gas Puffing in the JIPP T-IIU Tokamak*; Sep. 1990

- NIFS-41 K. Ida, K. Itoh, S.-I. Itoh, S. Hidekuma and JIPP T-IIU & CHS Group, *Comparison of Toroidal/Poloidal Rotation in CHS Heliotron/Torsatron and JIPP T-IIU Tokamak*; Sep. 1990
- NIFS-42 T. Watari, R. Kumazawa, T. Seki, A. Ando, Y. Oka, O. Kaneko, K. Adati, R. Ando, T. Aoki, R. Akiyama, Y. Hamada, S. Hidekuma, S. Hirokura, E. Kako, A. Karita, K. Kawahata, T. Kawamoto, Y. Kawasumi, S. Kitagawa, Y. Kitoh, M. Kojima, T. Kuroda, K. Masai, S. Morita, K. Narihara, Y. Ogawa, K. Ohkubo, S. Okajima, T. Ozaki, M. Sakamoto, M. Sasao, K. Sato, K. N. Sato, F. Shinbo, H. Takahashi, S. Tanahashi, Y. Taniguchi, K. Toi, T. Tsuzuki, Y. Takase, K. Yoshioka, S. Kinoshita, M. Abe, H. Fukumoto, K. Takeuchi, T. Okazaki and M. Ohtuka, *Application of Intermediate Frequency Range Fast Wave to JIPP T-IIU and HT-2 Plasma*; Sep. 1990
- NIFS-43 K. Yamazaki, N. Ohyabu, M. Okamoto, T. Amano, J. Todoroki, Y. Ogawa, N. Nakajima, H. Akao, M. Asao, J. Fujita, Y. Hamada, T. Hayashi, T. Kamimura, H. Kaneko, T. Kuroda, S. Morimoto, N. Noda, T. Obiki, H. Sanuki, T. Sato, T. Satow, M. Wakatani, T. Watanabe, J. Yamamoto, O. Motojima, M. Fujiwara, A. Iiyoshi and LHD Design Group, *Physics Studies on Helical Confinement Configurations with $l=2$ Continuous Coil Systems*; Sep. 1990
- NIFS-44 T. Hayashi, A. Takei, N. Ohyabu, T. Sato, M. Wakatani, H. Sugama, M. Yagi, K. Watanabe, B. G. Hong and W. Horton, *Equilibrium Beta Limit and Anomalous Transport Studies of Helical Systems*; Sep. 1990
- NIFS-45 R. Horiuchi, T. Sato, and M. Tanaka, *Three-Dimensional Particle Simulation Study on Stabilization of the FRC Tilting Instability*; Sep. 1990
- NIFS-46 K. Kusano, T. Tamano and T. Sato, *Simulation Study of Nonlinear Dynamics in Reversed-Field Pinch Configuration*; Sep. 1990
- NIFS-47 Yoshi H. Ichikawa, *Solitons and Chaos in Plasma*; Sep. 1990
- NIFS-48 T. Seki, R. Kumazawa, Y. Takase, A. Fukuyama, T. Watari, A. Ando, Y. Oka, O. Kaneko, K. Adati, R. Akiyama, R. Ando, T. Aoki, Y. Hamada, S. Hidekuma, S. Hirokura, K. Ida, K. Itoh, S.-I. Itoh, E. Kako, A. Karita, K. Kawahata, T. Kawamoto, Y. Kawasumi, S. Kitagawa, Y. Kitoh, M. Kojima, T. Kuroda, K. Masai, S. Morita, K. Narihara, Y. Ogawa, K. Ohkubo, S. Okajima, T. Ozaki, M. Sakamoto, M. Sasao, K. Sato, K. N. Sato, F. Shinbo, H. Takahashi, S. Tanahashi, Y. Taniguchi, K. Toi and T. Tsuzuki, *Application of Intermediate Frequency Range Fast Wave to JIPP T-IIU Plasma*; Sep. 1990
- NIFS-49 A. Kageyama, K. Watanabe and T. Sato, *Global Simulation of the Magnetosphere with a Long Tail: The Formation and Ejection of Plasmoids*; Sep. 1990

- NIFS-50 S.Koide, *3-Dimensional Simulation of Dynamo Effect of Reversed Field Pinch*; Sep. 1990
- NIFS-51 O.Motojima, K. Akaishi, M.Asao, K.Fujii, J.Fujita, T.Hino, Y.Hamada, H.Kaneko, S.Kitagawa, Y.Kubota, T.Kuroda, T.Mito, S.Morimoto, N.Noda, Y.Ogawa, I.Ohtake, N.Ohyabu, A.Sagara, T. Satow, K.Takahata, M.Takeo, S.Tanahashi, T.Tsuzuki, S.Yamada, J.Yamamoto, K.Yamazaki, N.Yanagi, H.Yonezu, M.Fujiwara, A.Iiyoshi and LHD Design Group, *Engineering Design Study of Superconducting Large Helical Device*; Sep. 1990
- NIFS-52 T.Sato, R.Horiuchi, K. Watanabe, T. Hayashi and K.Kusano, *Self-Organizing Magnetohydrodynamic Plasma*; Sep. 1990
- NIFS-53 M.Okamoto and N.Nakajima, *Bootstrap Currents in Stellarators and Tokamaks*; Sep. 1990
- NIFS-54 K.Itoh and S.-I.Itoh, *Peaked-Density Profile Mode and Improved Confinement in Helical Systems*; Oct. 1990
- NIFS-55 Y.Ueda, T.Enomoto and H.B.Stewart, *Chaotic Transients and Fractal Structures Governing Coupled Swing Dynamics*; Oct. 1990
- NIFS-56 H.B.Stewart and Y.Ueda, *Catastrophes with Indeterminate Outcome*; Oct. 1990
- NIFS-57 S.-I.Itoh, H.Maeda and Y.Miura, *Improved Modes and the Evaluation of Confinement Improvement*; Oct. 1990
- NIFS-58 H.Maeda and S.-I.Itoh, *The Significance of Medium- or Small-size Devices in Fusion Research*; Oct. 1990
- NIFS-59 A.Fukuyama, S.-I.Itoh, K.Itoh, K.Hamamatsu, V.S.Chan, S.C.Chiu, R.L.Miller and T.Ohkawa, *Nonresonant Current Drive by RF Helicity Injection*; Oct. 1990
- NIFS-60 K.Ida, H.Yamada, H.Iguchi, S.Hidekuma, H.Sanuki, K.Yamazaki and CHS Group, *Electric Field Profile of CHS Heliotron/Torsatron Plasma with Tangential Neutral Beam Injection*; Oct. 1990
- NIFS-61 T.Yabe and H.Hoshino, *Two- and Three-Dimensional Behavior of Rayleigh-Taylor and Kelvin-Helmholz Instabilities*; Oct. 1990
- NIFS-62 H.B. Stewart, *Application of Fixed Point Theory to Chaotic Attractors of Forced Oscillators*; Nov. 1990
- NIFS-63 K.Konn., M.Mituhashi, Yoshi H.Ichikawa, *Soliton on Thin Vortex Filament*; Dec. 1990
- NIFS-64 K.Itoh, S.-I.Itoh and A.Fukuyama, *Impact of Improved Confinement on Fusion Research*; Dec. 1990

- NIFS -65 A.Fukuyama, S.-I.Itoh and K. Itoh, *A Consistency Analysis on the Tokamak Reactor Plasmas*; Dec. 1990
- NIFS-66 K.Itoh, H. Sanuki, S.-I. Itoh and K. Tani, *Effect of Radial Electric Field on α -Particle Loss in Tokamaks*; Dec. 1990
- NIFS-67 K.Sato, and F.Miyawaki, *Effects of a Nonuniform Open Magnetic Field on the Plasma Presheath*; Jan.1991
- NIFS-68 K.Itoh and S.-I.Itoh, *On Relation between Local Transport Coefficient and Global Confinement Scaling Law*; Jan. 1991
- NIFS-69 T.Kato, K.Masai, T.Fujimoto, F.Koike, E.Källne, E.S.Marmor and J.E.Rice, *He-like Spectra Through Charge Exchange Processes in Tokamak Plasmas*; Jan.1991
- NIFS-70 K. Ida, H. Yamada, H. Iguchi, K. Itoh and CHS Group, *Observation of Parallel Viscosity in the CHS Heliotron/Torsatron* ; Jan.1991
- NIFS-71 H. Kaneko, *Spectral Analysis of the Heliotron Field with the Toroidal Harmonic Function in a Study of the Structure of Built-in Divertor* ; Jan. 1991
- NIFS-72 S. -I. Itoh, H. Sanuki and K. Itoh, *Effect of Electric Field Inhomogeneities on Drift Wave Instabilities and Anomalous Transport* ; Jan. 1991
- NIFS-73 Y.Nomura, Yoshi.H.Ichikawa and W.Horton, *Stabilities of Regular Motion in the Relativistic Standard Map*; Feb. 1991
- NIFS-74 T.Yamagishi, *Electrostatic Drift Mode in Toroidal Plasma with Minority Energetic Particles*, Feb. 1991
- NIFS-75 T.Yamagishi, *Effect of Energetic Particle Distribution on Bounce Resonance Excitation of the Ideal Ballooning Mode*, Feb. 1991
- NIFS-76 T.Hayashi, A.Takei, N.Ohyabu and T.Sato, *Suppression of Magnetic Surface Breaking by Simple Extra Coils in Finite Beta Equilibrium of Helical System*; Feb. 1991
- NIFS-77 N.Ohyabu, *High Temperature Divertor Plasma Operation*; Feb. 1991
- NIFS-78 K.Kusano, T.Tamano and T.Sato, *Simulation Study of Toroidal Phase-Locjng Mechanism in Reversed-Field Pinch Plasma*; Feb. 1991
- NIFS-79 K.Nagasaki, K.Itoh and S-I.Itoh, *Model of Divertor Biasing and Control of Scrape-off Layer and Divertor Plasmas*; Feb. 1991
- NIFS-80 K.Nagasaki and K.Itoh, *Decay Process of a Magnetic Island by Forced Reconnection*; Mar.1991